



THE SOURCE FOR COMMERCIAL FLOORCOVERINGS
> Our solutions fit every environment



ENTRANCE DEFENSE

4-5 Entrance Zone Defense

SHEET GOODS

- | | |
|-------------------------------|---------------------------------|
| 6 Introduction to Sheet Goods | 12 Coco/Coir Matting |
| 7 Atlas | 13 Synthetic Coco Matting |
| 8-9 Champion Super Nop | 14 Eagle |
| 10 Champion | 15 Hercules |
| 11 Cougar | 16 New! Protect Super |
| | 17 New! Protect Ultimate |

TILE GOODS

- | | |
|--------------------------------|--|
| 18 Introduction to Carpet Tile | 25 Dominator |
| 19 Atlas Tile | 26 Dominator LP |
| 20 Champion LP | 27 Enterprise & Cross Stitch |
| 21 Champion XP | 28 Introduction to TACFAST® Backing |
| 22-23 Champion Super Nop | 29-30 Senator One- Step & Soft-Step Carpet Tiles |
| 24 Diplomat | |

LOGO & PLAIN MATS

- | | |
|---|--------------------------|
| 31 Introduction to Finished & Logo Mats | 34 vG Quadra Impressions |
| 32 Champion Super Nop for Logo mats | 35 Designer Coir |
| 33 Designer 38 | 36 Hydro Mat |
| | 37 vG Tough Rib |

ANTI-FATIGUE MATS INDUSTRIAL MATS GRID SYSTEMS

- | | |
|---|--|
| 38-39 Industrial Mats: Bubble Mats Kitchen Mats | 41 Introduction to Grid Mats |
| 40 Anti-Fatigue: Diamond Plate Safety Step Comfort Step 42 Marble Step 24 | 42 Power Grid |
| | 43 Premier Grid with TacFast® backing option |

LUXURY VINYL

- | | |
|--|--|
| 44 Introduction to Natures View Luxury Vinyl | 46-47 Natures View Style Rustique- 6 x 36 Planks |
| 45 Natures View- 4 x 36 Planks | 47 Natures View LVT- 18 x18 Tile |

MISC.

- | | |
|--|---|
| 48-49 Reducer/ Edging & Transition Strip Options | 51 Maintenance Guide for commercial roll & tile goods |
|--|---|

• 2

vG Inc. products are CRI GREEN LABEL PLUS CERTIFIED! Catagory 18x & 47x



There is a growing demand to make indoor environments as healthy and "green friendly" as possible. Choosing the right materials is a critical step. **Now all of our products -roll/sheet goods and tile goods pass the GLP (Green Label Plus) tests.** As GLP was designed for architects, builders, specifiers and facility managers who wanted assurances that their products met stringent criteria, GLP ensures they are purchasing among the lowest emitting voc carpet and adhesive products on the market.

FAQ's

• GLP products set a higher standard for indoor air quality.


• To receive GLP certification, our carpet and tile products had to undergo a rigorous testing process, as required by section 01350 guidelines. This measured emissions for a range of chemicals and was administered by an independent laboratory. The test methodology for small scale environment chamber testing was developed in cooperation with the U.S. Environmental Protection Agency (EPA).

• CRI-GLP represents the 4th time the carpet industry has voluntarily enhanced the IAQ standards for its products.

PRODUCT SWATCHES


All swatches in catalog are digital representations and may vary from product color. When selecting colors, please request actual samples.

ICONS GUIDE

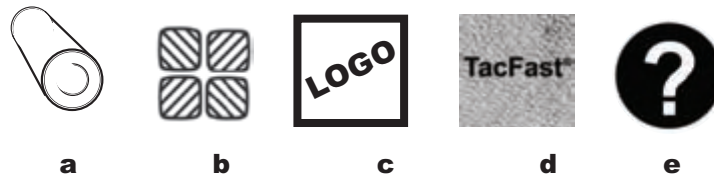

- a > Sheet Goods
 b > Modular Carpet Tiles
 c > Can be used for Logo Mats
 d > Available with TacFast® Backing
 e > For More Information

TESTING DATA SYMBOLS

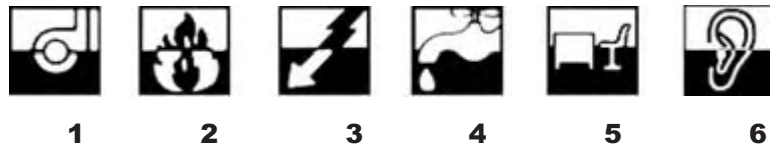

- 1 > Wear & Durability - Carpeting is tested for suitability of use with castor chairs [EN985]
 2 > BS4790 Hot Metal Nut test is used to determine the effects of fire Pill Test ASTM D2859
 3 > Tested to IBM/ICL industry test standards for static electricity [prEN1815]
 4 > Testing Colorfastness of carpeting to both light [ISO105 BO2 1994] and water [EN ISO 105 EO1 1996]
 5 > Commercial tests are carried out to determine durability of a carpet in an office environment
 6 > Tested to ISO 140 - 8 Acoustic Installation from impact noise and calculated values from ISO 717 - 2:1988 and ISO 354 Acoustic Absorption Co-efficient to be below 24 dB



Company History

van Gelder Inc. is a family run business for over 35 years. We offer a variety of specialty flooring products. Our range includes Entrance Matting, Anti-Fatigue Flooring, Logo & Commercial Mats, Modular Carpet Tiles, the TacFast® Carpet Tile System, Grid Matting Systems and Luxury Vinyl Planks & Tile, just to name a few. All of our products continue to play a vital role in providing commercial spaces with a safe, clean and attractive exterior and interior environments and entranceways.

We pride ourselves on offering realistic solutions for every stage of the floor covering process. With our long-term solutions we can save you time, money and resources. Plus, you'll be purchasing the most innovative products, which can be customized to suit your needs!

We are constantly improving our range to meet and exceed LEED / ECO friendly requirements. Our dedicated team of sales, customer service and support staff is well prepared to answer all your matting and specialty flooring questions or requests.

Call us today!

Products and Services

Need samples, LEED information, pricing, specifications, or product catalogs? Let us do the work for you! Our years of experience and industry insight will help you offer your customers the best solutions for their flooring/matting needs.


Give us a call, 1+866.284.6287 we'd love to speak with you, or email us at sales@vangelder-inc.com. Go online - visit us at www.vangelder-inc.com. As part of our ongoing commitment to our customers we offer a broad assortment of products, in a range of prices for interior and exterior applications.

We know you have a choice when it comes to commercial flooring and matting. Our team looks forward to the opportunity of working with you on future projects.

For Additional Information, to Locate a Sales Representative or for Technical Questions

van Gelder Inc.
1680 Hwy 41 South
Calhoun, GA 30701

Toll Free: 1+866.284.6287
Phone: (706) 602.4186
Fax: (706) 602.4191
Tollfree fax: 1+888.329.2844
email: sales@vangelder-inc.com
website: www.vangelder-inc.com

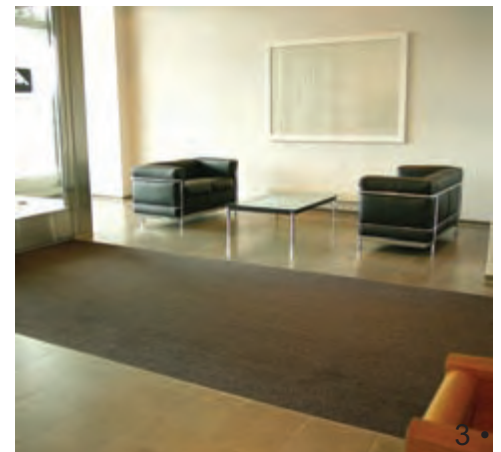

Entrance Zone Defense

A well designed entrance system plays a vital role in providing a safe, clean & attractive entrance way and interior environment. The best and most cost effective solutions for decreasing maintenance costs are effective entrance matting systems. Entrance safety is worth a fortune, but it does not have to cost it. When it comes to high traffic entrances, nothing is more important than the safety of your employees or customers. That's why all of vG's products are tested to make sure they live up to the strictest safety standards in the industry.


vG's Entrance Zone Defense System can be a 1, 2 or 3 part system. Performance is ranked by the number of zones utilized - A single mat system achieves good results, but a three-part entrance matting system provides superior performance, whilst saving you time and money.

Zone 1 | SCRAPE

? OUTSIDE SECTION - Scrapes Heavy Debris.

According to TRSA research, within commercial buildings more than 80% of the dust, dirt and grime is tracked in from the outside via footwear. This tracked in soil effects not only the appearance of interiors but also the quality of air.

Custom Mats or Sheet Goods pages 6 - 17
Finished or Logo Mats pages 31 - 37

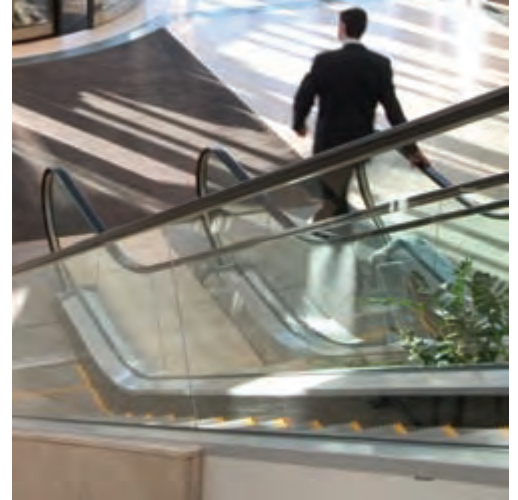

Zone 2 | CLEAN

? VESTIBULE OR AIRLOCK SECTION - Cleans & Absorbs Moisture.

TRSA studies also show that one square yard of commercial carpeting can accumulate one pound of dirt per week and up to two pounds during wet weather.

Grid Mats page 41 - 43
Custom Mats or Sheet Goods pages 6 - 17
Modular Tiles pages 18-30




Zone 3 | DRY

? INTERIOR SECTION - Absorbs Moisture & Dries.

Further studies indicate that the cost of removing one pound of dirt from a building can easily exceed \$600.

Custom Mats or Sheet Goods pages 6-17
Modular Tiles pages 18-30
Finished or Logo Mats pages 31-37

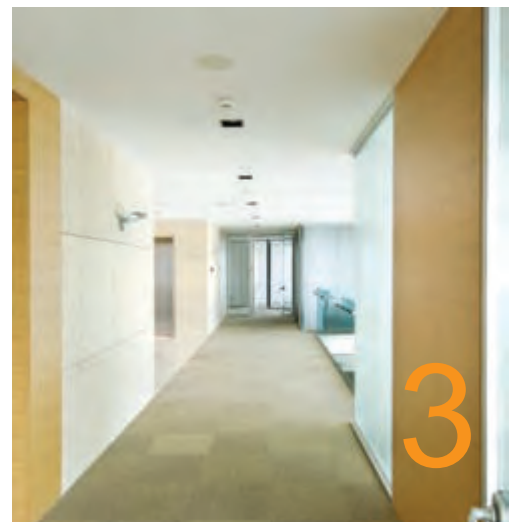

EXIT

Zone 1 | SCRAPE
Outdoors

Zone 2 | CLEAN
Vestibule or Airlock

Zone 3 | DRY
Interior



DID YOU KNOW?

For every 800 people entering a facility, 1 pound of dirt is left behind! The estimated cost for removing this pound of dirt from a modern building can exceed \$600. (Study completed by the ISSA).

Commercial Flooring experts suggest that a minimum of 5 to 6 steps or 18 linear feet from Zone 1 to Zone 3 is required for a zone system to effectively keep dirt out. This can stop 80% of dirt and moisture from entering your facilities. By using any one of our walk-off products you will lower your maintenance cost, achieve better air quality and have a safer building by reducing the opportunity of slip-fall accidents. Let vG Inc.'s floorcovering experts customize your entranceway.

First Impressions: All commercial, retail or industrial businesses strive to maintain a clean, professional and presentable foyer or entrance way. First impressions are important and your entryway is the first thing a customer experiences when they enter your facility.

The quick solution that many business owners utilize is a service that will lay machine washed mats that are replaced weekly or biweekly for a rental charge. This is the right idea but the wrong approach. When you use a service, the replacement that is brought out is often not a new mat, but a washed mat.

It's a Matter of Fact: Rental matting must be rubber backed and machine washable and often its construction is very thin and inexpensive, so they can be reused over and over again.

Ask Yourself: How many times has your replacement mat looked worse?
Are you paying hundreds/thousands of dollars a year for mats, and they barely last a year?

Your Solution: vG's matting material can be customized to fit any size area.

This eliminates the trap that most of us fall into when having to pick standard sizes that the rental companies only supply. Our service will accommodate the exact size that you need with a thicker, more durable, "safety track" back, engineered for the heaviest of traffic.

The majority of our products have a Five-Year Wear Warranty. If you amortize the cost of our products over their life, you will find a better cost efficient alternative than paying the ongoing rental fees. By using vG's entrance matting products you'll provide superior protection for any exterior or interior flooring surface by trapping dirt, foot fall debris and moisture in your entrance areas.

The Results:

- Cleaner and safer entryways
- Extended longevity for all interior flooring
- Increase in interior air quality due to less foot fall debris entering spaces
- Decrease in maintenance costs






Features & Benefits:

- Sheet (roll) goods
- 6'7" or 13'2" wide rolls
- Cleaned by vacuuming or hosing
- Crush resistant
- Easily installed
- Highly resistant to surface abrasion
- Indoor/outdoor usage
- Lay flat/stay flat technology
- Naturally anti-static
- Customizable colors/patterns
- Perfect for Logo or Finished Mats
- Can be cut into any size/shape
- No edge unravel
- Protects floors
- Reduces floor maintenance
- Stain resistant
- Traps dirt and moisture
- Unaffected by climate extremes
- U.V. stable
- Variety of products for any budget

DID YOU KNOW?

As our industry evolves vG continues to search and offer products that are on the forefront of flooring technology. Among these are our needlepunched products that are health conscious and environmentally friendly. From the fibers used that eradicate dust mites; eliminate bacteria, mold, and fungi, which can trigger asthma and allergy sufferers, to our tiles with a TacFast® backing, we offer complete solutions for you.

- 1. Grey 1131
- 2. Charcoal 1198
- 3. Black Shadow 2343
- 4. Midnight Sky 5154
- 5. Aspen 6265
- 6. Sisal 1099
- 7. Beige 1153
- 8. Harvest 1244
- 9. Chocolate 1197
- 10. Bordeaux 7178

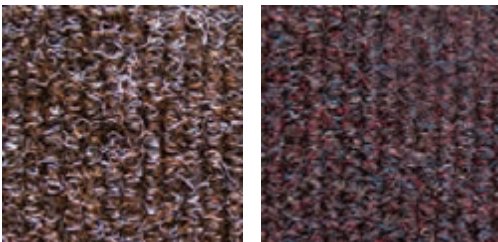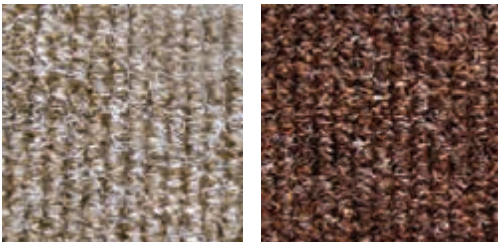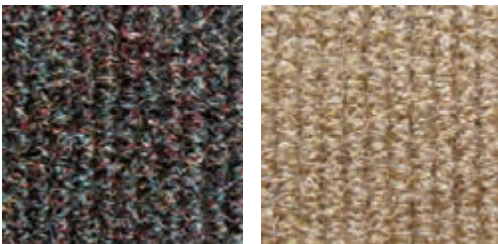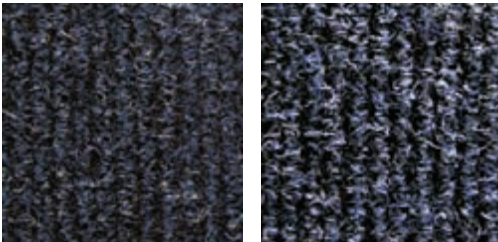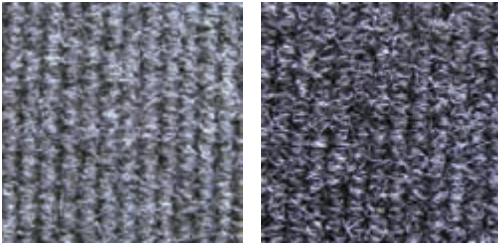

Atlas

A single ribbed corduroy product designed for areas where a hard wearing, easily maintained and low cost flooring is required.

Specifications

Construction	Non woven Single rib pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium composite rubber	
Pile Height	.18 in.	
Total Height	.47 in.	
Pile Weight	44 oz/sy	
Total Weight	65 oz/sy	
Width	6'7" or 13'2"	
Custom	Special sizes, finished and logo mats	
Electrostatic Propensity	DIN EN 1815	>2kV
Smoke Density	ASTM E662-13	Passes
Surface Flammability	FF 1-70 / ASTM D2859	Passes
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	



Champion Super Nop

Our most popular logo mat material in roll goods, features warm neutrals, fashionable brights and classic standard colors. Champion Super Nop is one of our highest quality products that truly has something for everyone.

Specifications

Construction	Non woven Hobnail (berber) pattern	
Fiber	100% solution dyed UV stabilized ASOTA polypropylene fibers	
Backing	Premium composite rubber	
Pile Height	.25 in.	
Total Height	.47 in.	
Pile Weight	54 oz/sy	
Total Weight	78 oz/sy	
Width	6'7" or 13'2"	
Custom	Special sizes, finished and logo mats	
Electrostatic Propensity	DIN EN 1815	>2kV
Smoke Density	ASTM E662-13	Passes
Surface Flammability	FF 1-70 / ASTM D2859	Passes
LEED	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	

[Also available in tile goods, turn to page 22 for details]



CSN [Champion Super Nop]




1. Bright Red 3014
2. Cardinal Red 3353
3. Solid Crimson 3031
4. Burgundy 3036
5. Garnet 3138
6. Pink 3091
7. Orange 3018
8. Yellow 1025
9. Gold 1039
10. Sky Blue 5149
11. Royal Blue 5182
12. Azure 5181
13. Steel Blue 5157
14. Midnight Blue 5154
15. Prism 5155
16. Purple 3090
17. Turquoise 6096
18. Kelly Green 6042
19. Verde Green 6043
20. Hunter Green 6022
21. Autumn 2048
22. Loden 6081
23. Sand 1064
24. Coir/Natural 1099
25. Natural Beige 1153
26. Zinc 7006
27. Taupe 2345
28. Rosewood 7178
29. Chocolate 7097
30. Walnut 7068
31. Teak 7185
32. Sterling 2344
33. Black Shadow 2343
34. Gris/Charcoal 2098
35. Solid Black 2000
36. White 1000





- 1. Silver Grey 305
- 2. Charcoal 307
- 3. Azure 314
- 4. Oceanic 306
- 5. Beige 318
- 6. Chocolate 312
- 7. Crystal 300

Large swatch - Silver Grey 305

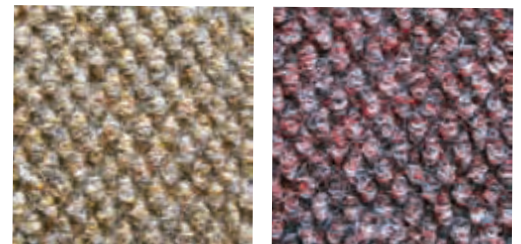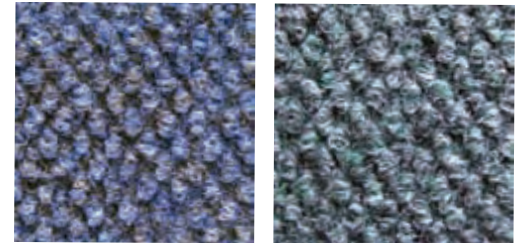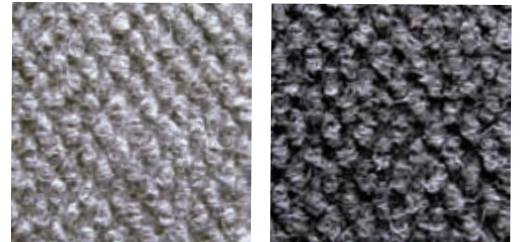






Champion

The ever popular berber broadloom construction provides an aesthetically pleasing design option in a heavyweight configuration.

Specifications

Construction	Non woven Hobnail (berber) pattern
Fiber	100% solution dyed UV stabilized polypropylene
Backing	Premium composite rubber
Pile Height	.25"
Total Height	.47"
Pile Weight	54 oz./sy
Total Weight	78 oz./sy
Width	6'7" only
Custom	Special sizes, shapes, finished or logo mats
Dimensional Stability	Pass
Electrostatic Propensity	>2kV
Flammability Rating	
Smoke Density ASTM E662	Passes
Surface Flammability FF 1-70 / ASTM D2859	Passes
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5



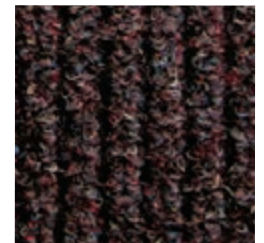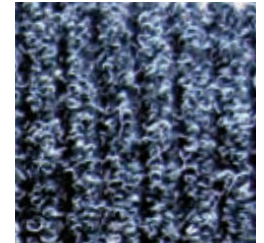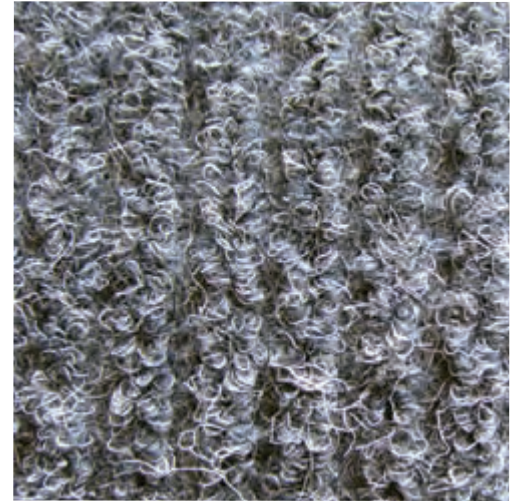

Cougar

A double ribbed product ideally suited for indoor or outdoor areas where there is high traffic. Cougar is hard wearing, easily maintained and perfect for flooring projects that are under tight budget constraints.

Specifications

Construction	Non woven Double Rib pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium composite rubber	
Pile Height	.18 in.	
Total Height	.47 in.	
Pile Weight	44 oz/sy	
Total Weight	65 oz/sy	
Width	6'7" or 13'2"	
Custom	Special sizes, finished and logo mats	
Electrostatic Propensity	DIN EN 1815	>2kV
Smoke Density	ASTM E662-13	Passes
Surface Flammability	FF 1-70 / ASTM D2859	Passes
LEED	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	

Large swatch - Grey 2131

- | | |
|----------------------|------------------|
| 1. Grey 2131 | 2. Charcoal 2198 |
| 3. Midnight Sky 5154 | 4. Aspen 6265 |
| 5. Harvest 1244 | 6. Bordeaux 7178 |





Coco/Coir Matting

This unique, natural mat is ideal for recessed wells and entryways. Perfect for projecting an environmental or health conscious image, this mat is made with coconut fibers. Can be created with or without a logo.



Specifications

Construction	Fusion Bonded Non directional
Fiber	Natural Coconut fibers (yarn)
Backing	Vinyl
Pile Height	.475"
Total Height	5/8" (16mm)
Pile Weight	24 oz./sy
Total Weight	85 oz./sy
Width	6'7" only
Custom	Special sizes, finished and logo mats
LEED	MR Credit 6, IEQ Credit 5



*Please note that all colors other than natural are vegetable dyed.

Color transfer may occur if material gets wet.

> Recommended use indoors



**NEW PATTERNED
Coco Matting**



Large swatch - Natural nc04

- | | |
|-----------------------|-----------------------|
| 1. Natural nc04 | 3. Black nc02 |
| 2. Grey nc01 | 5. Green nc04 |
| 4. Blue nc03 | 7. Red nc06 |
| 6. Brown nc05 | 8. Black Bean ncp07 |
| 9. Saddle Brown ncp08 | 10. Scarlet Red ncp09 |





Synthetic Coco

Created to have the same look and feel as our Natural Coco Matting, this synthetic alternative is just as effective but without the shedding.

Specifications


Construction	Non Directional Smooth/Velour
Fiber Content	100% Solution dyed UV stabilized polypropylene
Backing	Crumb Rubber
Pile Height	.422 in.
Total Height	.625 in.
Pile Weight	54 oz/sy
Total Weight	130 oz/sy
Width	6'7" only
Custom	Special sizes, finished and logo mats
Electrostatic Propensity	>2kV
Smoke Density	Passes
Surface Flammability	Passes
LEED	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5

> Use indoors or outdoors, unaffected by moisture, salts, bleach and other common chemicals.



1. Black - syn0211
2. Natural - syn0111
3. Brown - syn0311



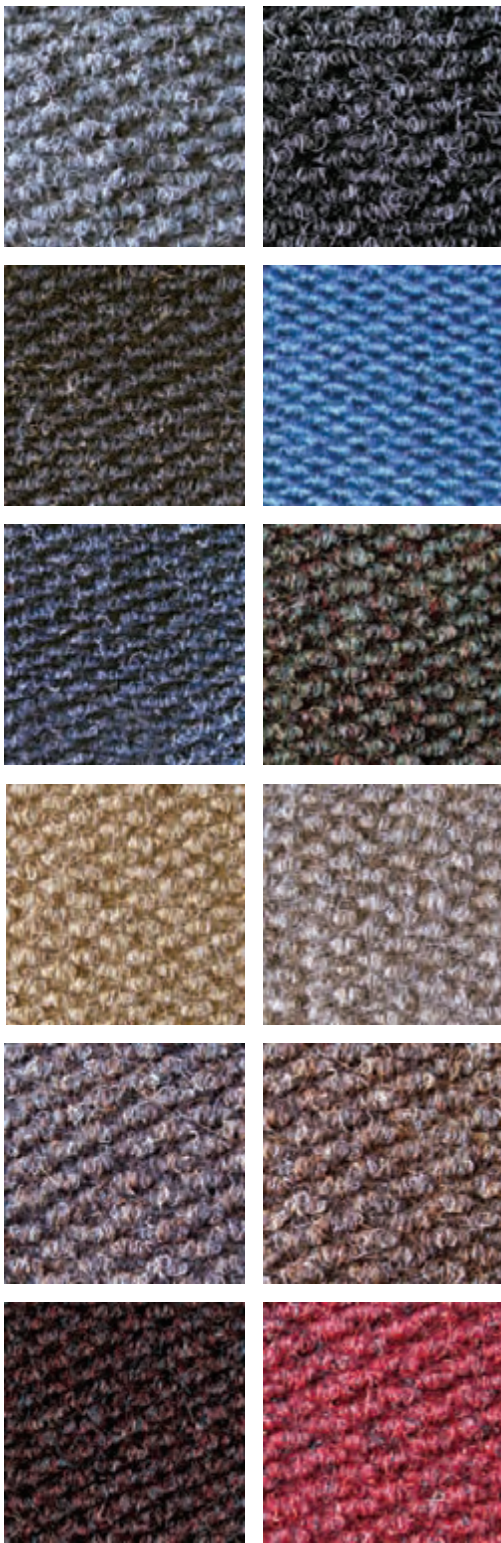

- 1. Grey 905
- 2. Anthracite 907
- 3. Black Shadow 2343
- 4. Marine 1382
- 5. Midnight Sky 5154
- 6. Aspen 6265
- 7. Sisal 1099
- 8. Beige 918
- 9. Chocolate 912
- 10. Harvest 1244
- 11. Bordeaux 7178
- 12. Cardinal Red 3353



Eagle

A fiberbond berber style, Eagle is designed to be high heel safe. It traps 80% of sand, dirt, moisture, and other substances, which can destroy or harm interior flooring. Eagle is the economical choice for high traffic applications.

Specifications

Construction	Non woven Hobnail (berber) pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium composite rubber	
Pile Height	.18 in.	
Total Height	.47 in.	
Pile Weight	44 oz/sy	
Total Weight	65 oz/sy	
Width	6'7" or 13'2"	
Custom	Special sizes, finished and logo mats	
Electrostatic Propensity	DIN EN 1815	>2kV
Smoke Density	ASTM E662-13	Passes
Surface Flammability	FF 1-70 / ASTM D2859	Passes
LEED	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	

[Also available in tile goods, see Champion XP Tile page 21]




Hercules

This 4x2 textured carpet provides visual depth and substance with its heathered colors. Hercules' durability comes from its extra thick cords which can withstand the toughest of traffic. Can be used in interior or exterior environments.

Specifications

Construction	Non woven 4 x 2 rib pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium composite rubber	
Pile Height	.25 in.	
Total Height	.47 in.	
Pile Weight	54 oz/sy	
Total Weight	78 oz/sy	
Width	6'7" only	
Custom	Special sizes, finished and logo mats	
Electrostatic Propensity	DIN EN 1815	>2kV
Smoke Density	ASTM E662-13	Passes
Surface Flammability	FF 1-70 / ASTM D2859	Passes
LEED	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	



Large swatch - Merlot 220



- 1. Merlot 220
- 2. Silver Grey 205
- 3. Charcoal 207
- 4. Baltic Blue 211
- 5. Northern Pine 223
- 6. Camel 218
- 7. Mocha 215





- 1. Black 3071
- 2. Steel Blue 3025
- 3. Cocos 3042
- 4. Dark Brown 3005
- 5. Grey 3061

(Large swatch 3061)

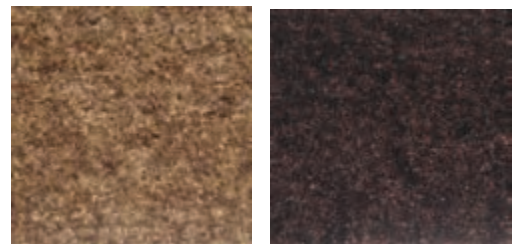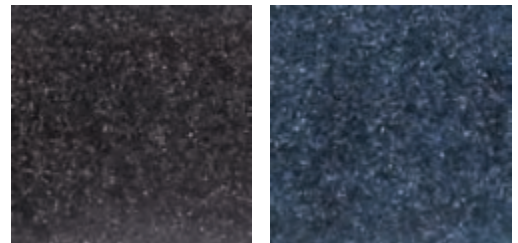





NEW! Protect Super

Over 75% of dirt in a building is tracked in from the outside. Protect Super provides a strong barrier to dirt, resulting in cleaner buildings. You will see a significant cost savings in maintenance and cleaning over the lifetime of your floors. All the advantages of Nylon matting with a high end appearance.

Specifications

Construction:	Tufted 5/32" cut pile
Fiber	100% BCF Nylon
Primary Backing (Rolls)	Colbac non woven polyester
Secondary Backing (Rolls)	Comfort Vinyl
Pile Height	.27"
Total Height	.35"
Pile Weight	24.2 oz/sy
Total Weight	126 oz/sy
Width	6'7" only
Custom	Special sizes, finished and logo mats
Electrostatic Propensity	>2kV
Radiant Panel Test	Class 1
Smoke Density	Passes
Surface Flammability	Passes
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5



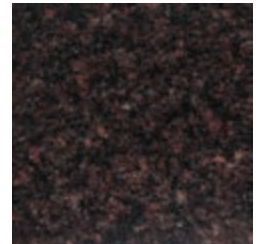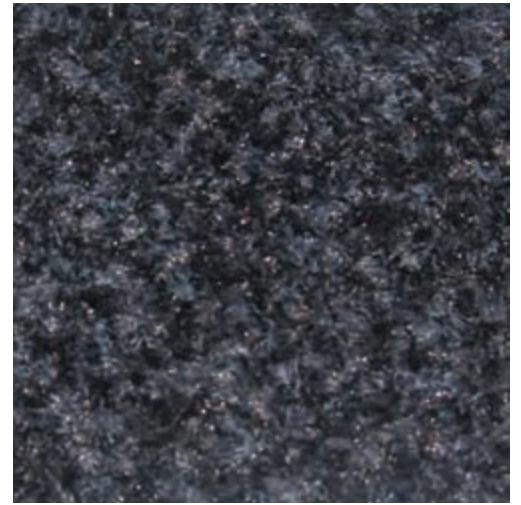

Large swatch - Steel Grey 606

1. Steel Grey 606
2. Smoke 608
3. Indigo Blue 602
4. Caramel 605
5. Coffee Bean 605

NEW! Protect Ultimate

All the advantages of Protect Super, but with additional higher friction nylon fibers. This provides for a more aggressive soil removal by trapping large quantities of dirt and moisture at the entrance - up to 1 gallon of water per square yard!

Specifications

Construction:	Tufted 5/32" cut pile
Fiber	100% BCF Nylon (33% recycled yarns)
Primary Backing (Rolls)	Colbac non woven polyester
Secondary Backing (Rolls)	Comfort Vinyl
Pile Height	.27"
Total Height	.38"
Pile Weight	24.2 oz/sy
Total Weight	126 oz/sy
Width	6'7" only
Custom	Special sizes, finished and logo mats
Electrostatic Propensity	>2kV
Radiant Panel Test	Class 1
Smoke Density	Passes
Surface Flammability	Passes
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5



Carpet Tiles offer versatility, high performance and a range of design options.

By allowing you to define spaces, designers and architects can add style to common areas and create distinctive floorcovering solutions.


Ideal across a range of environments from healthcare to education, carpet tiles are great for areas where raised access flooring is installed. The tiles can be individually lifted, causing minimal disruption. Plus – worn tiles at high traffic points can be easily replaced, either by new or unworn tiles taken from the recesses of the carpeted area.

Installation Instructions for Carpet Tiles:

Before laying, it is recommended the tiles are stored at room temperature 60°F-70°F (15°C-20°C).

The tiles can be loose laid on flat, dry floors free from impurities such as oil, grease etc. Cracked floors should be filled, and uneven floors covered with hardboard.

Dusty floors should be primed. Because of the high insulation value of these tiles it is not recommended they be laid when under floor heating systems are in use. On very large installations, it is advisable to secure 1 in 5 rows with double-sided tape. Where tiles are to be used under caster chairs, they should be fully secured. The tiles may be laid by marking a cross in the center of the room and working outwards. From this, the marker cross may be moved to facilitate the use of full tiles in doorways, etc. Tiles must be laid by turning alternate tiles through 90 degrees to obtain a checker pattern. An arrow on the back of each tile indicates the pile direction. It is recommended that tiles with the same batch number be laid together.

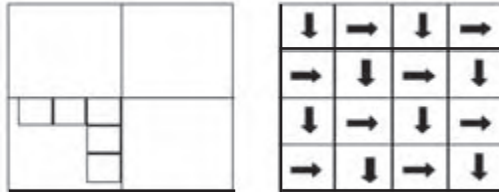

The Results:

- Cleaner and safer entryways
- Increase in interior air quality due to less foot fall debris entering spaces
- Decrease in maintenance costs
- Extended longevity for all interior flooring
- Versatility

Features & Benefits:

- 19.69 in. x 19.69 in.
- Highly resistant to surface abrasion
- Reduces floor maintenance
- Cleaned by vacuuming or hosing
- Indoor usage
- Stain resistant
- Crush resistant
- Lay flat/stay flat technology
- Traps dirt and moisture
- Easily installed
- Naturally anti-static
- Thermal acoustic properties
- Protects floors
- Unaffected by climate extremes

DID YOU KNOW?

The composition/durability of carpet tiles combined with the wide variety of colors and sizes makes any carpet tile ideal for use in: entrances, elevators, gyms, hospitals, offices, restaurants, sports facilities, supermarkets, universities and any other space/portico which requires appearance/safety enhancement.




Atlas Tile

So popular in roll goods form we decided to make it in tile. Great for designers looking for linear textured tiles with superior scraping performance.

Specifications


Construction	Non woven single rib pattern	
Fiber	100% solution dyed stainproof miracle fiber	
Total Weight	114 oz. per s/y	
Backing	Premium (eco) Bitumen or TacFast™	
Pile Height	.375 in.	
Total Height	.50 in.	
Pile Weight	60 oz./sy	
Total Weight	170 oz./sy	
Tile Size	19.69" x 19.69"	
1 Carton	12 tiles 32.5 sq. ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	

1. Charcoal Only

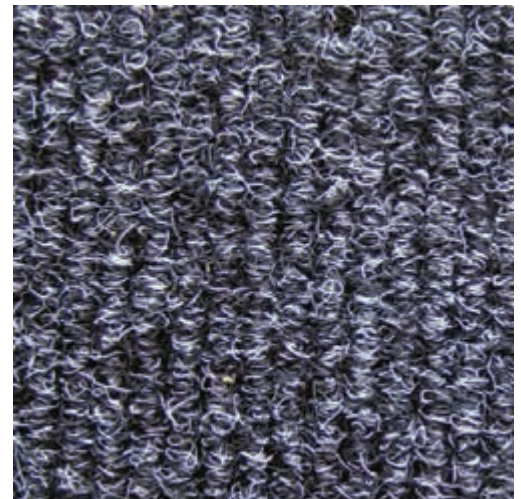



- 1. Smokey Grey 1531
- 2. Marble 1593
- 3. Marine 1546
- 4. Olive 1048
- 5. Beige 1153
- 6. Khaki 1006
- 7. Chocolate 1097
- 8. Cardinal Red 1353

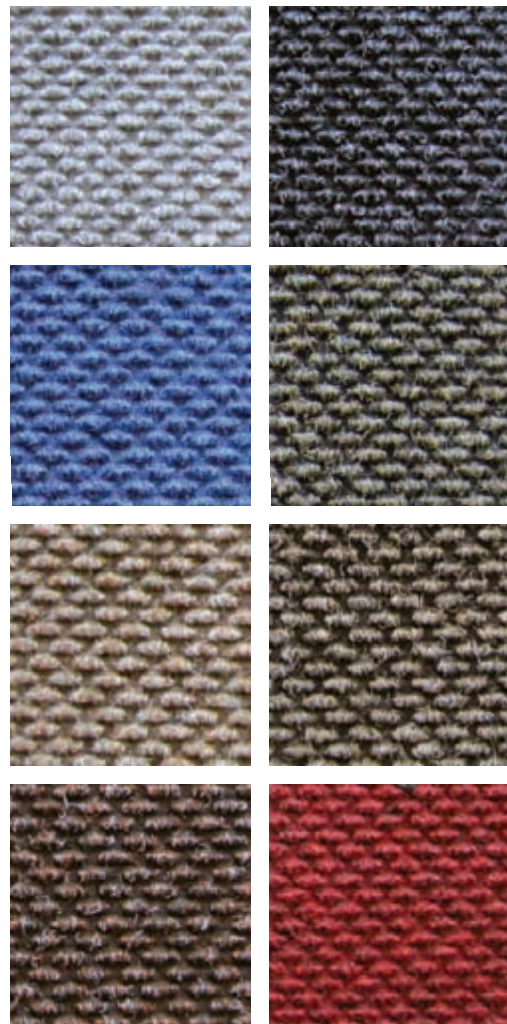


Champion LP Tile

Monochromatic by design, this dense berber tile features unmatched durability and flexibility. Champion LP is easy to install and maintain at an affordable price.

Specifications

Construction	Non woven berber (cobble) pattern	
Fiber	100% solution dyed stainproof miracle fiber	
Total Weight	114 oz. per s/y	
Backing	Premium (eco) Bitumen	
Pile Height	.30 in.	
Total Height	.34 in.	
Pile Weight	24 oz./sy	
Total Weight	114 oz./sy	
Tile Size	19.69" x 19.69"	
1 Carton	12 tiles 32.5 sq. ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	






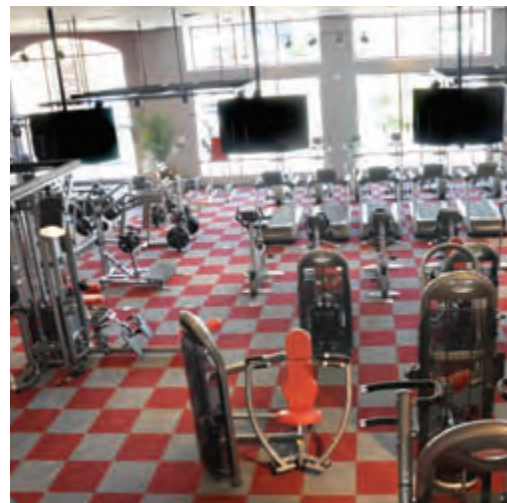


Champion XP Tile

Ideally suited for designers looking for style & practicality, this heavy material has a "cobble" construction. If you're looking for an easy to fit, high wearing product, Champion XP is your floorcovering answer.

Specifications

Construction	Non woven Hobnail (berber) pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium (eco) Bitumen	
Pile Height	.20 in.	
Total Height	.47 in.	
Pile Weight	44 oz./sy	
Total Weight	172 oz./sy	
Tile size	19.69" x 19.69"	
1 carton	12 tiles or 32.5 sq.ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	

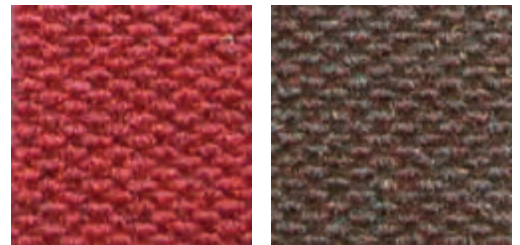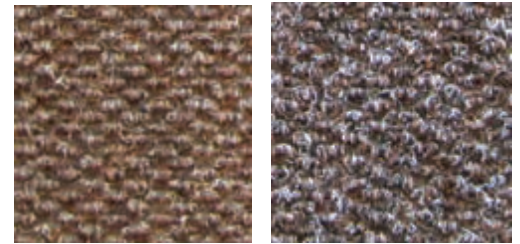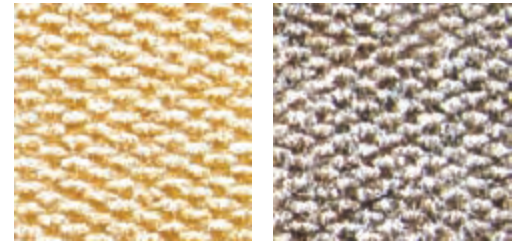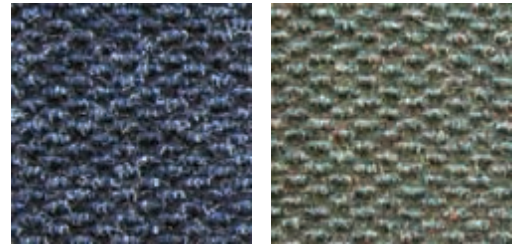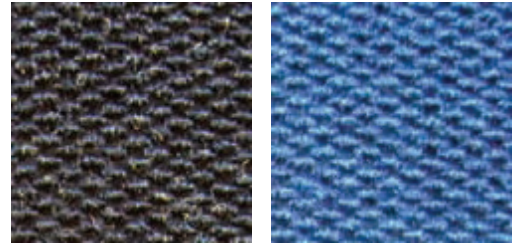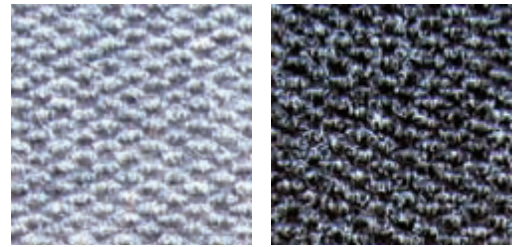

- | | |
|-----------------------|---------------------|
| 1. Mid Grey 1340 | 2. Anthracite 1303 |
| 3. Black Shadow 2343 | 4. Marine 1328 |
| 5. Midnight Sky 5154 | 6. Aspen 6265 |
| 7. Sisal 1399 | 8. Brown Sugar 1353 |
| 9. Harvest 1244 | 10. Cocoa 1301 |
| 11. Cardinal Red 1305 | 12. Bordeaux 7178 |


Champion Super Nop Tile

Our most popular logo mat material is not only available in roll goods but tiles too! Featuring warm neutrals, fashionable brights and classic standard colors. Champion Super Nop Tile is our highest quality product that truly has something for everyone.

Specifications

Construction	Non woven Hobnail (berber) pattern	
Fiber	100% solution dyed UV stabilized ASOTA™ polypropylene fibers	
Backing	Bitumen	
Pile Height	.25 in.	
Total Height	.47 in.	
Pile Weight	54 oz/sy	
Total Weight	78 oz/sy	
Width	6'7" or 13'2"	
Tile size	19.69" x 19.69"	
1 carton	12 tiles or 32.5 sq. ft.	
Custom	Special sizes, finished and logo mats	
Electrostatic Propensity	DIN EN 1815	>2kV
Smoke Density	ASTM E662-13	Passes
Surface Flammability	FF 1-70 / ASTM D2859	Passes
LEED	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	

[Also available in roll goods, turn to page 8 for details]

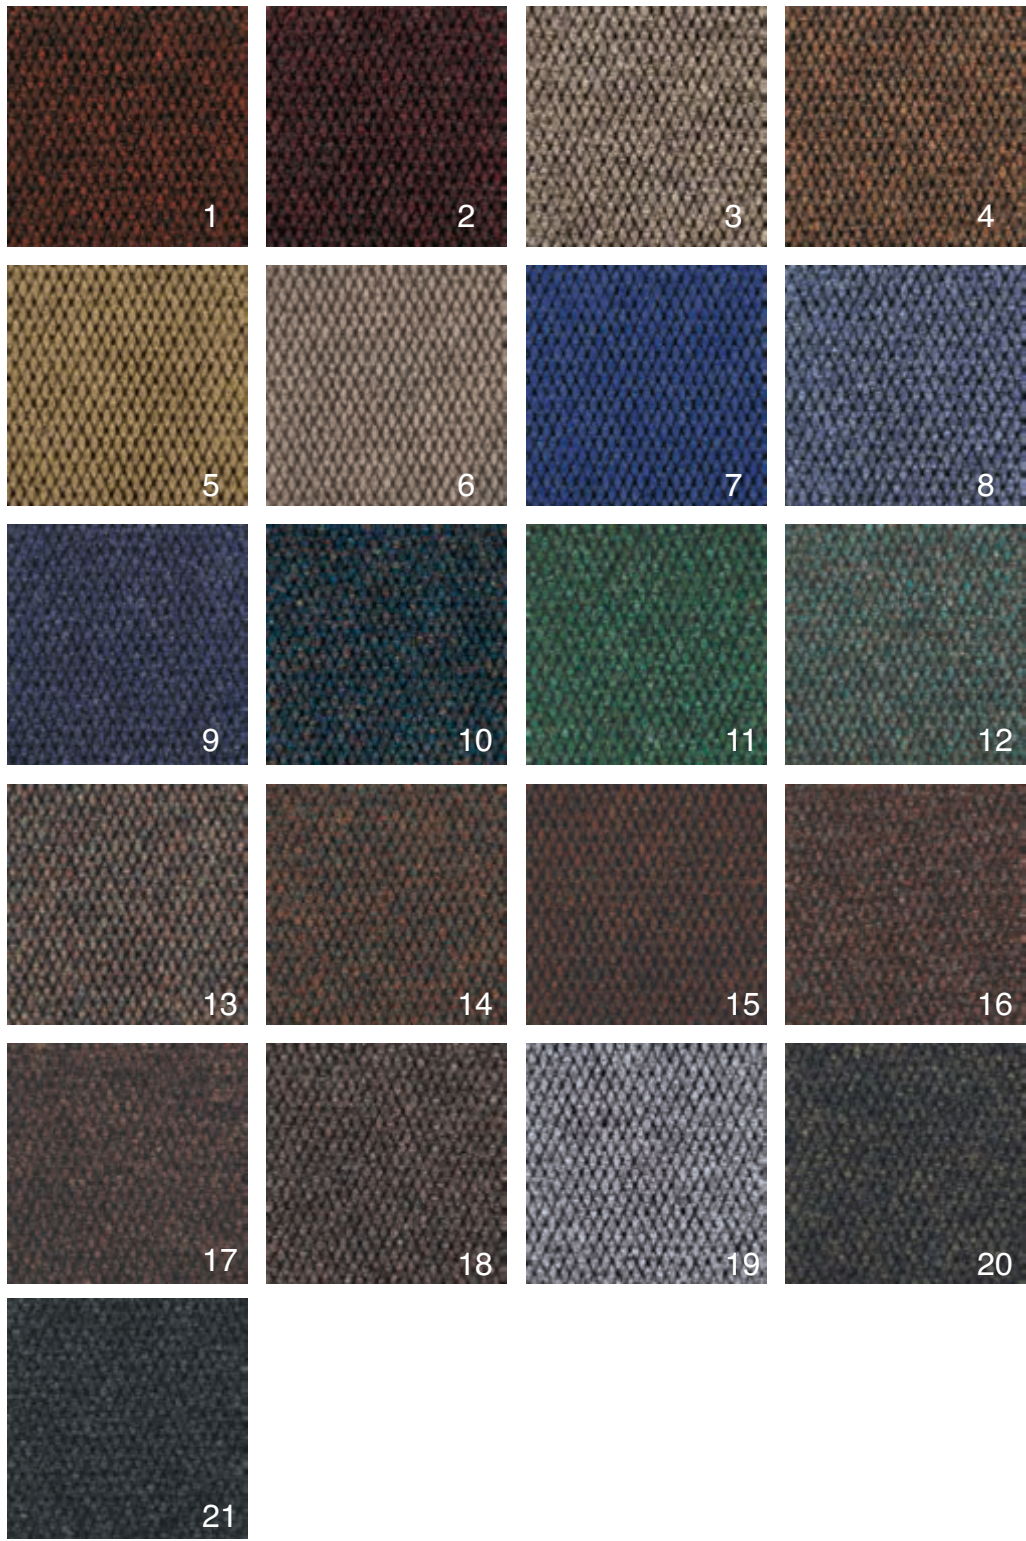

- | | | | |
|------------------------|----------------|-----------------------|-----------------------|
| 1. Cardinal Red 3353 | 2. Garnet 3138 | 3. Natural Beige 1153 | 4. Zinc 7006 |
| 5. Coir/Natural 1099 | 6. Taupe 2345 | 7. Azure 5181 | 8. Steel Blue 5157 |
| 9. Midnight Blue 5154 | 10. Prism 5155 | 11. Verde Green 6043 | 12. Hunter Green 6022 |
| 13. Autumn 2048 | 14. Loden 6081 | 15. Rosewood 7178 | 16. Chocolate 7097 |
| 17. Walnut 7068 | 18. Teak 7185 | 19. Sterling 2344 | 20. Black Shadow 2343 |
| 21. Gris/Charcoal 2098 | | | |



1. Mink



2. Smoke



3. Tan



4. Heath




Diplomat Tile

Introducing the latest tile that can be used in any entrance area where extreme foot and cart traffic occurs. Diplomat's unique dirt pocket configuration effectively removes and traps dirt and moisture.

Specifications

Construction	Non woven high/low structured loop dirt pocket pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium (eco) Bitumen or TacFast	
Pile Height Pocket Height	.375 in. .187 in.	
Total Height	.50 in.	
Pile Weight	60 oz./sy	
Total Weight	170 oz./sy	
Tile size	19.69" x 19.69"	
1 carton	12 tiles or 32.5 sq.ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	





Large swatch - Mid Grey 112

- 1. Mid Grey 112
- 2. Anthracite 93
- 3. Indigo Blue 90
- 4. Tan 116
- 5. Pebble 114
- 6. Heath 115
- 7. Walnut 113




Dominator Tile






One of our heaviest and most durable products in the line. Engineered to withstand the constant foot traffic encountered in many commercial establishments.

Specifications

Construction	Non woven Diagonal pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium (eco) Bitumen or TacFast	
Pile Height Pocket Height	.375 in. .187 in.	
Total Height	.50 in.	
Pile Weight	57 oz./sy	
Total Weight	169 oz./sy	
Tile size	19.69" x 19.69"	
1 carton	12 tiles or 32.5 sq.ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	



- 1. Mid Grey 1512
- 2. Anthracite 1593
- 3. Black Shadow 2343
- 4. Denim 1590
- 5. Olive 1594
- 6. Autumn Green 1595
- 7. Pebble 1514
- 8. Cognac 1596
- 9. Root Beer 1597
- 10. Cranberry 1598

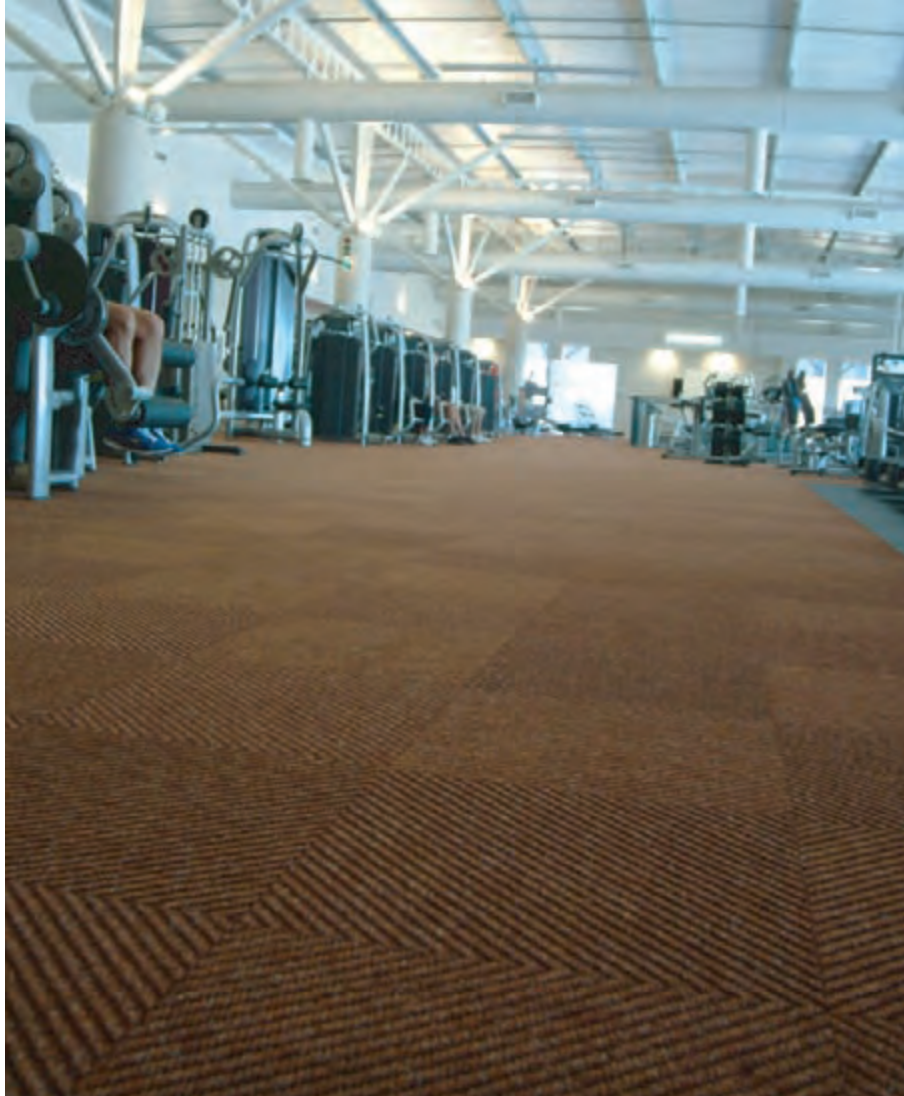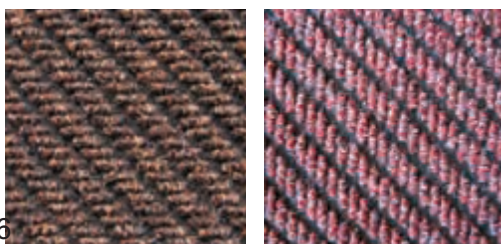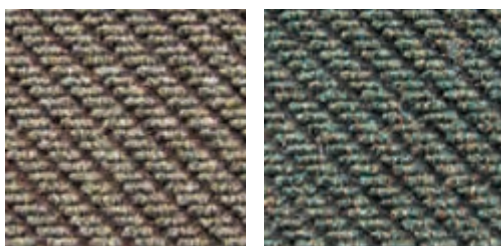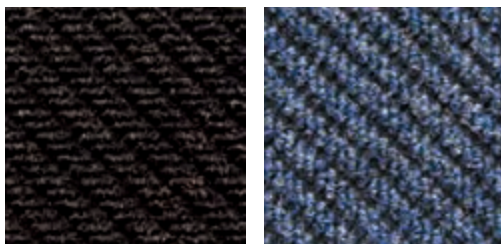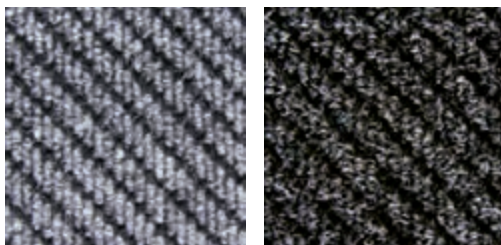

Dominator LP

Dominator LP is an extremely durable carpet tile that offers all the benefits of Dominator Tile, but in a lighter weight.

Specifications

Construction	Non woven Diagonal pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium (eco) Bitumen	
Pile Height	.25 in.	
Total Height	.37 in.	
Pile Weight	39 oz./sy	
Total Weight	142 oz./sy	
Tile size	19.69" x 19.69"	
1 carton	20 tiles or 54.18 sq.ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	





Enterprise Tile

Specifications

Construction	Non woven high/low structured loop dirt pocket pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium (eco) Bitumen or TacFast®	
Pile Height Pocket Height	.25 in. .187 in.	
Total Height	.50 in.	
Pile Weight	65 oz./sy	
Total Weight	175 oz./sy	
Tile size	19.69" x 19.69"	
1 carton	12 tiles or 32.5 sq.ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	

1. Charcoal Only

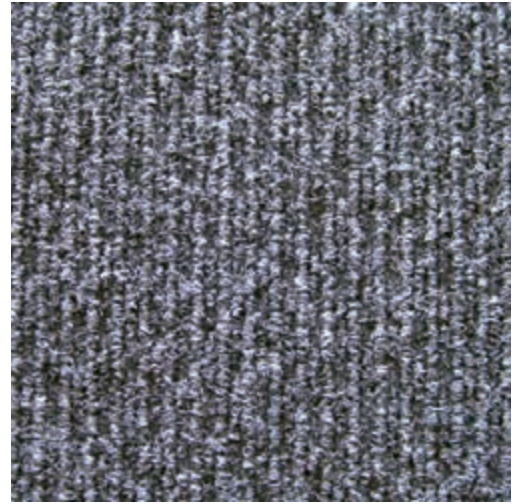

1. Charcoal Only



Cross Stitch Tile

Specifications

Construction	Non woven Tight rib corduroy designer pattern	
Fiber	100% solution dyed UV stabilized polypropylene fibers	
Backing	Premium (eco) Bitumen or TacFast®	
Pile Height	.375 in.	
Total Height	.50 in.	
Pile Weight	65 oz./sy	
Total Weight	175 oz./sy	
Tile size	19.69" x 19.69"	
1 carton	12 tiles or 32.5 sq.ft.	
Electrostatic Propensity	EN 1815	>2kV
Radiant Panel	ASTM E648	Class II
Smoke Density	Passes	
Surface Flammability	Passes	
LEED:	MR Credit 4, IEQ Credit 4.1, IEQ Credit 4.3, IEQ Credit 5	



Tac Fast® Carpet Tile System

TacFast® Carpet Tile System simplifies installation and provides for flexibility with a user and environment-friendly product.

This system offers consumers the following capabilities:

Designed to Last for Multiple Changes

Use the hook tape for repeated changes of the carpets tiles.

Ease of Removal

Remove the carpet tile at any time easily and without cost or mess.

Easy Access to the Floor

Access the sub-floor as necessary for maintenance, renovation or to clean the carpet tiles.

Environment- Friendly


Eliminate using liquid adhesives in installation with the consequent reduction in VOC (Volatile Organic Compounds) emissions.

Functional Flexibility


Replace heavy traffic areas as required saving on the need to change the entire floor area.

Simplified Installation

Make multiple attempts during installation without compromising the carpet tile.

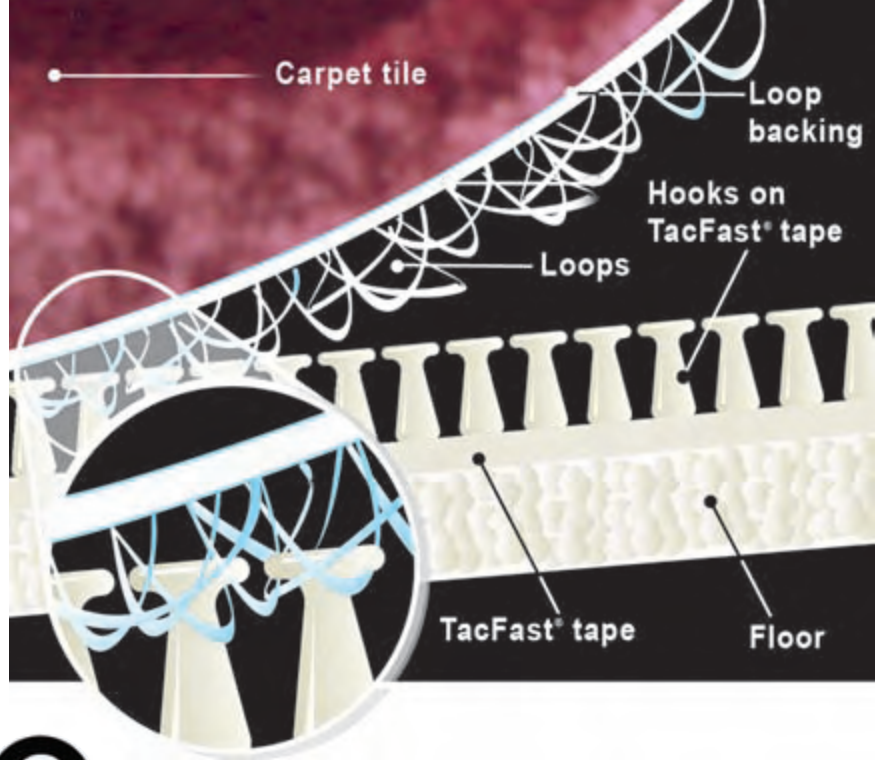

The concept is based on a hook and loop fastening system using carpet tile which has a loop material covering its entire underside. Hook tapes are fastened to the sub-floor by means of a pressure-sensitive adhesive. The hook and loops 'engage' and form a mechanical bond, which holds the carpet in place.





The installation of Senator One-Step Carpet Tiles is accomplished in a “one-step” process as the pre-attached pieces (surface module and hook substrate) are installed simultaneously – making installation quick, clean and easy. The simplicity and flexibility of the installation method makes Senator One-Step™ with TacFast an excellent product line for the Commercial Retail Market. (See below images as a guide for installation).




Senator One-Step Tile

Senator One-Step™ Carpet Tiles with TacFast® backing, create a free-floating modular floor that can be installed over any sub floor without any attachment to that sub floor.

Specifications

Construction	Needle Felt- Plush Velour
Fiber Content	50% Polypropylene, 20% Nylon, 30% Polyester
Total Weight	359 oz. per s/y
Backing	Bitumen or TacFast with Plates
Thickness	.62"
Tile size	19.69" x 19.69"
1 carton	10 tiles or 27.09 sq.ft.
Wear Warranty	7 years on flat surfaces
Electrostatic Propensity	Permanently anti-static
Flammability Rating	(See below)
Pill Test - ASTM D2859	Pass
Hot Metal Nut Test - BS4790/BS5287	Pass
LEED	May contribute towards points, inquire




Senator Soft-Step Anti-Fatigue Tile



Ideal across a range of environments, this tile is perfect for facilities that require floor covering that must endure the constant impact from employees standing for multiple hours. It's anti-fatigue backing provides superior comfort and relief to aching feet and tired legs.

Specifications

Construction	Needle Felt - Plush Velour
Fiber Content	50% Polypropylene, 20% Nylon, 30% Polyester
Total Weight	359 oz. per s/y
Backing	Bitumen/closed cell foam
Thickness	.62"
Tile size	19.25" x 19.25"
1 carton	10 tiles or 25.7 sq.ft.
Wear Warranty	7 years on flat surfaces
Electrostatic Propensity	Permanently anti-static
Flammability Rating	(See below)
Pill Test - ASTM D2859	Pass
Hot Metal Nut Test - BS4790/BS5287	Pass
LEED	May contribute towards points, inquire



1. Charcoal Only - both One and Soft-Step

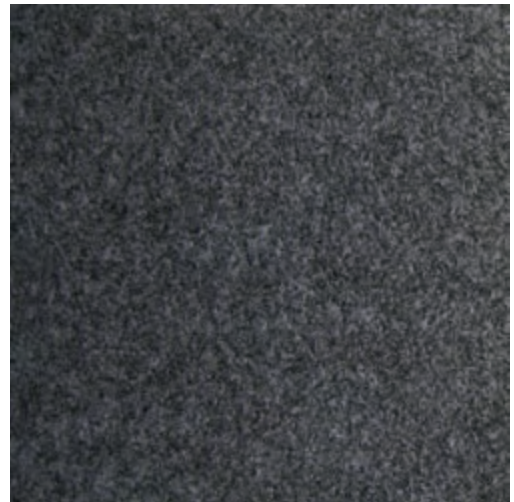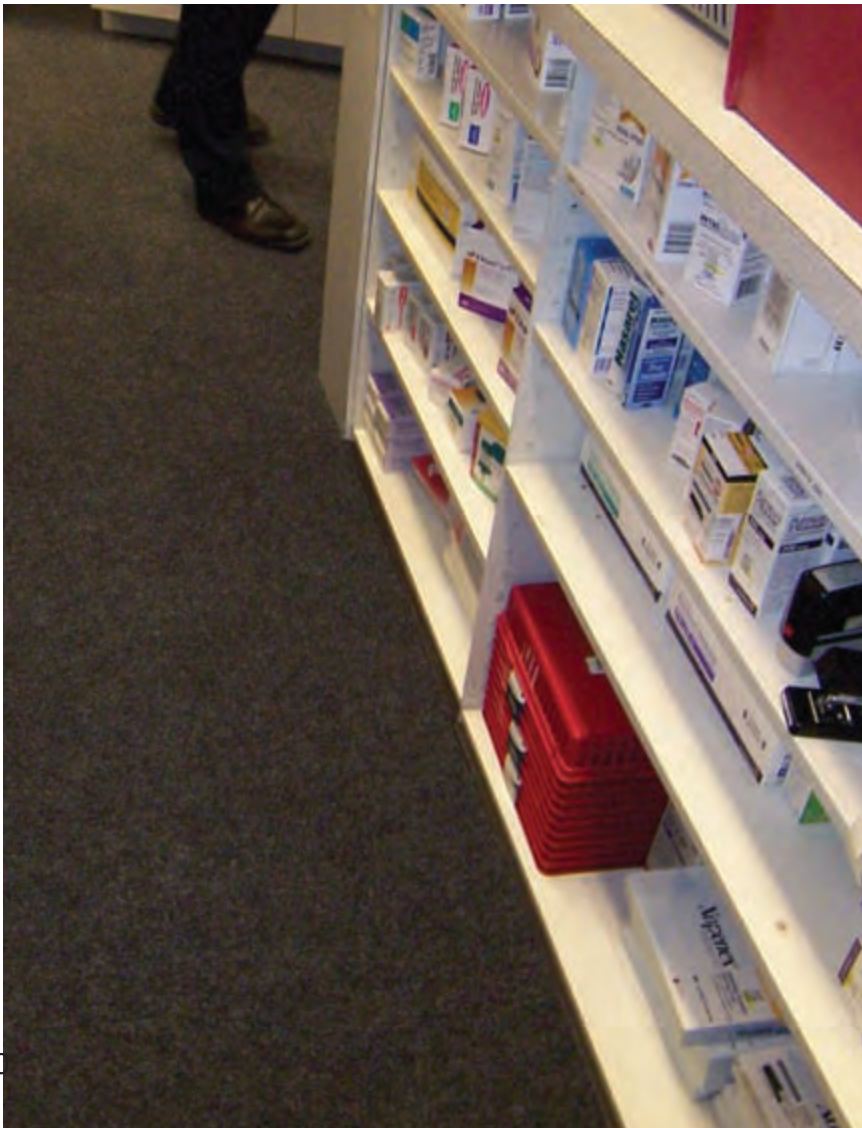



Custom Plain & Logo Matting

vG is proud to offer a line of diverse logo and custom matting solutions for your indoor or outdoor commercial applications. Whether you are looking to increase your brand recognition or retail sales by making a new statement, we can help. Casual or elegant, large or small, high or low traffic, logo and plain mats are a perfect design solution for any commercial space. No matter what your budget, we have a matting solution for you!


The following pages are highlights from our top selling plain and logo mats. Should you not find what you are looking for let us know. There are plenty of other plain and logo matting products that are available to you, they are just not shown in this catalogue.

For more information on samples, quotes or to request a catalogue or proof contact us at:
 Toll Free: 1+(866) 284.6287 | Phone: (706) 602.4186 | Fax: (706) 602.4191
 email: amanda@vangelder-inc.com | sales@vangelder-inc.com | www.vangelder-inc.com

Logo Mat Selection Chart - **HIGHLIGHTS**

Printed Matting	Base Material	Logo Process	Outdoor Use	Traffic Level	Color Match	Price	Custom Sizes	Average Delivery <small>(after signed art proof)</small>	Recessed Application	
Quadra Print	Nylon	Jet Print	No	Medium	Med/High	Moderate	Yes	2 weeks	No	page 34
Precision Cut - Inlaid Matting										
Champion Super Nop	Needlepunch Polypropylene	Inlaid	Yes	High	Medium	High	Yes	3 weeks	Yes	page 31
Designer 38	Nylon	Inlaid	No	Medium	Med/High	Med/High	Yes	3-4 weeks	Yes	page 33
Hydro Logo	Needlepunch Polypropylene	Inlaid	Yes	High	Medium	Moderate	No	3-4 weeks	No	page 36
Designer Coir Logo	Coir (Coconut Fiber)	Inlaid	No	Medium	Medium	High	Yes	3-4 weeks	Yes	page 35



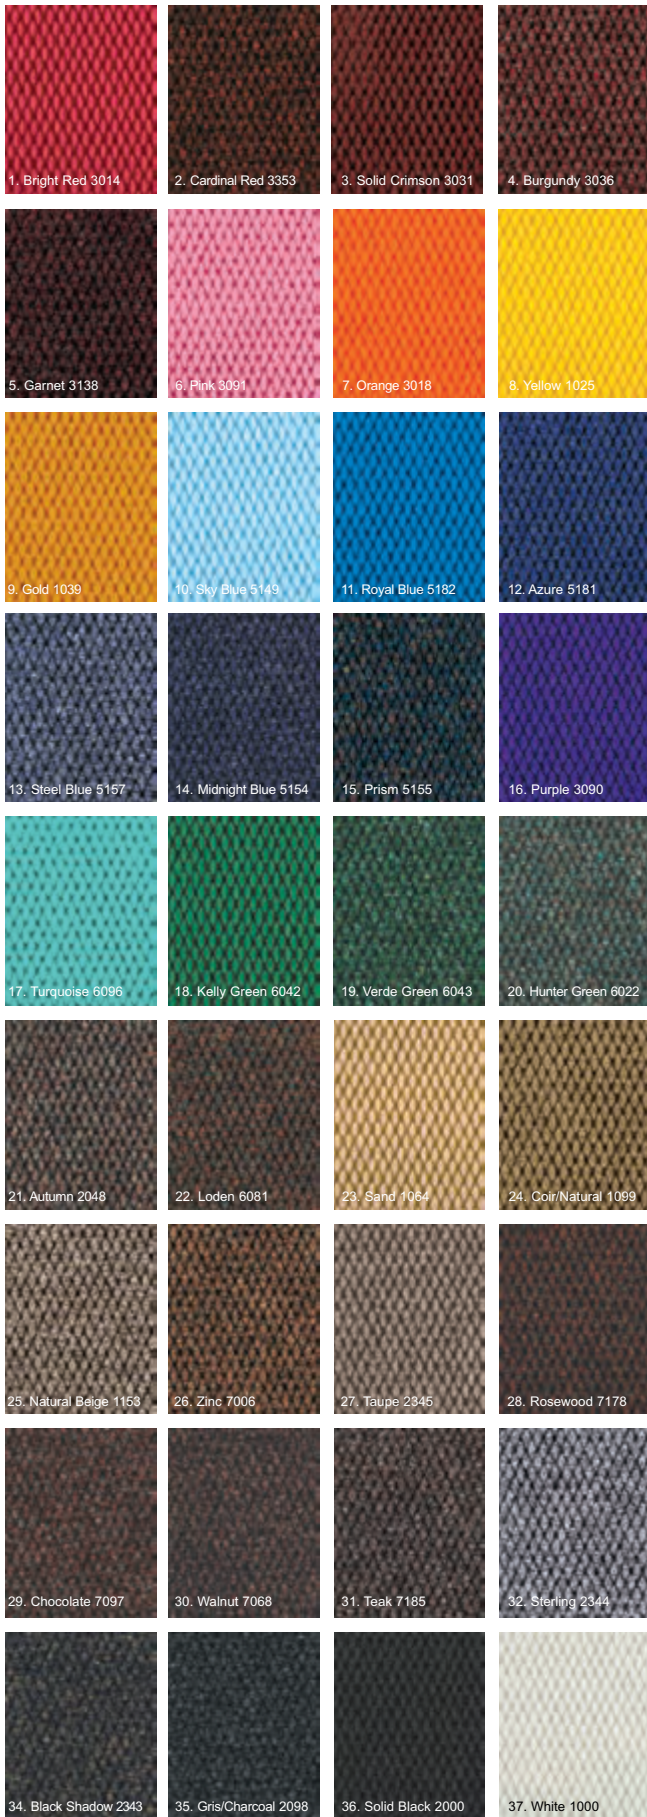

Champion Super Nop

Champion Super Nop is the ultimate indoor/outdoor matting. This 1/2 in. thick mat is made of durable, long lasting, UV stable polypropylene. Combine this with a high profile vinyl edging that is sewn and glued and you get the best looking, most functional mat in the industry.

- Indoor/ Outdoor mat
- 100% polypropylene
- Heavy edging keeps mat flat and in position
- All weather non skid backing

Specifications

Construction
Non woven | Hobnail (berber) pattern

Fiber
100% solution dyed UV stabilized ASOTA polypropylene fibers

Backing
Premium composite rubber

Pile Height .25 in.

Total Height .47 in.

Pile Weight 54 oz/sy

Total Weight 78 oz/sy


Width 6'7" or 13'2"

Electrostatic Propensity
DIN EN 1815 >2kV


Smoke Density
ASTM E662-13 Passes

Surface Flammability
FF 1-70 / ASTM D2859 Passes

LEED MR Credit 4,
IEQ Credit 4.1,
IEQ Credit 4.3,
IEQ Credit 5

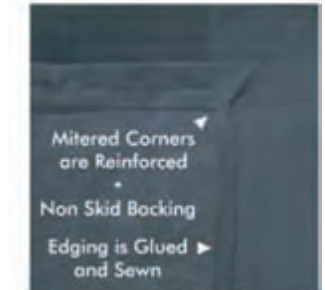

Power Loc- Underside

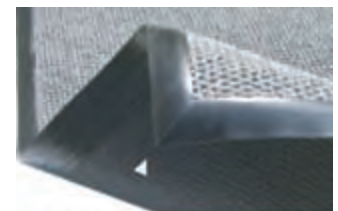


1/2" High Profile Vinyl Reducer Edging

Custom Sizes

Width: Up to 13' w/ out seam

Length: Up to 70' w/out seam

Custom : Custom widths, lengths, shapes and sizes available

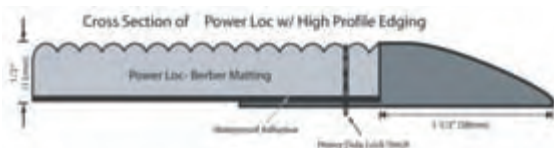

Designer 38

1/2" Nylon Commercial Custom Rug

Designer 38 offers a warm residential look for commercial applications. Excellent for use in lobbies, locker rooms, offices, reception areas or tradeshow. If you are tired of the industrial matting look, try Designer 38.

- Smooth and dense 38 oz. nylon
- Low profile vinyl edging available
- Custom shapes and sizes
- Logo or Plain matting options


Product Specifications

Graphic Method:	Inlaid and Flat Carved
Fiber Weight:	38 ounces per square yard
Total Weight:	68 ounces per square yard
Construction:	Tufted Textile
Backing:	Fleece (Standard) or Non Skid
Edging:	<ul style="list-style-type: none"> • Low Profile Vinyl Edging (Standard) • Bound • Serged
Thickness:	1/2" (13mm)
Face Fiber:	Nylon
Testing:	Passes- ASTM-D-2859 Pill Test Class 2- Flooring Radiant Panel Test(ASTM-E-648); Less than 450-NBS Smoke Chamber Test; Anti-Static- Yes Test
Durability:	7 ●●●●●○○○
Warranty:	1 year
Order Time:	3-4 weeks after signed art proof

Standard Sizes

18' x 24'	3' x 12'	6' x 10'
2' x 3'	4' x 6'	6' x 12'
3' x 4'	4' x 8'	6' x 20'
3' x 5'	4' x 10'	8' x 20'
3' x 6'	4' x 12'	12' x 12'
3' x 8'	6' x 6'	
3' x 10'	6' x 8'	


Custom Sizes

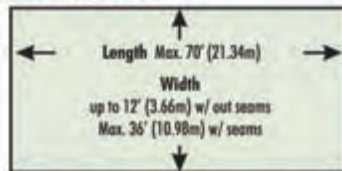

Custom : Custom shapes and sizes available



These are the most common colors. A catalog of 150 colors are available. PDF's of these are available upon request. Pin Dot patterns and Solution Dyed colors are also available.

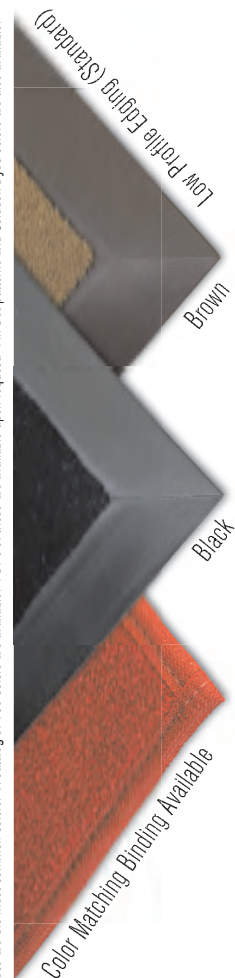



Quadra Print

This low budget, jet dye printed nylon mat, has a washable nitrile rubber backing. Using a 4 color dye printing process, vG's Quadra Impressions print can create almost any color and image that you require. Indoor use only.

Specifications

Construction	Tufted textile
Fiber Content	Nylon
Pile Weight	24 oz. per s/y
Total Weight	55 oz. per s/y
Backing	Rubber
Thickness	5/16" (8mm)
Wear Warranty	1 year on flat surfaces
Electrostatic Propensity	Permanently anti-static

Standard Sizes (actual)

2' x 3' (23" x 35")	4' x 8' (45" x 95")
3' x 4' (35" x 47")	5' x 8' (58" x 95")
3' x 5' (35" x 59")	5' x 10' (58" x 119")
3' x 10' (35" x 119")	6' x 10' (70" x 119")
4' x 6' (45" x 69")	6' x 12' (70" x 143")

Custom Sizes Available

Widths (actual)

3' (35"); 4' (45"); 5' (58"); 6' (70");


Lengths

Up to 23' long



> Rubber Backing




Cross Section of Quadra Print

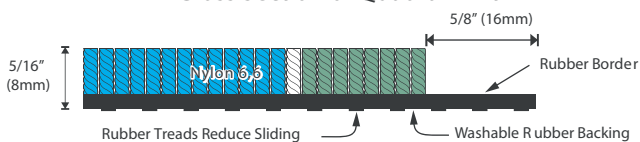



Designer Coir/Coco

vG Coco Matting is a unique, natural mat ideal for recessed wells and entryways. Perfect for projecting an environmental or health conscious image, this mat is made with coconut fibers. Can be created with or without a logo.

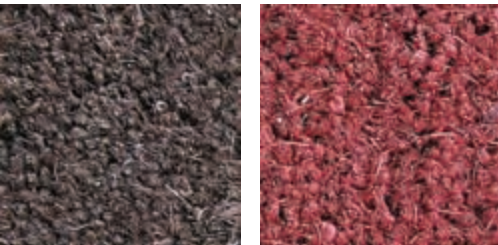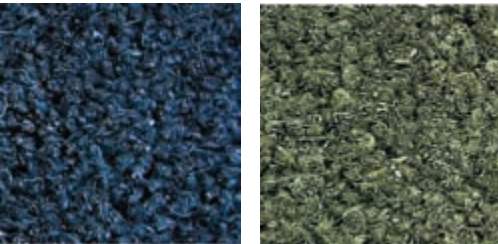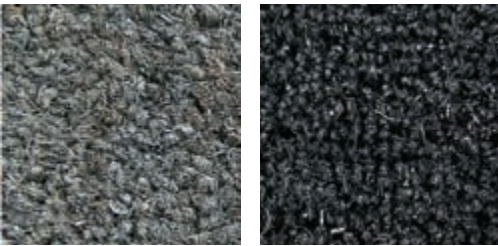

Specifications

Construction	Fusion Binding Natural Coconut fibers
Fiber Content	Natural Coconut fibers
Pile Weight	24 oz. per s/y
Total Weight	85 oz. per s/y
Backing	Vinyl
Thickness	1/2" (13mm), 5/8" (16mm), 1 3/16" (30mm)
Wear Warranty	1 year on flat surfaces
Electrostatic Propensity	Permanently anti-static
Standard Sizes	18" x 24" 3' x 16' 4' x 16' 2' x 3' 3' x 20' 4' x 20' 3' x 4' 4' x 6' 6' x 8' 3' x 5' 4' x 8' 6' x 12' 3' x 10' 4' x 10' 6' x 20' 3' x 12' 4' x 12'
Custom Sizes Available	Maximum width 6' w/out seams Maximum length 40'

- 1. Natural
- 2. Grey
- 3. Black
- 4. Blue
- 5. Green
- 6. Brown
- 7. Red



- > No Edging- for recessed well applications
- > Brown Edging
- > Black Edging

Custom widths, lengths & shapes available



Circle Half Moon Custom Shape



SPECIAL ORDER
NATURAL ONLY

1/2" Thick

STOCKED
COLORS ONLY

5/8" Thick

SPECIAL ORDER
NATURAL ONLY

1-3/16" Thick



Hydro Mat


A unique rubber backed mat that is cleated to quickly scrape dirt and snow and withstand excessive traffic. Can be created with or without a logo.

Specifications

Construction	Waffle/cleated pattern
Fiber Content	100% solution dyed polypropylene
Pile Weight	24 oz. per s/y
Total Weight	104 oz. per s/y
Backing	Nitrile rubber
Thickness	3/8" (10mm)
Wear Warranty	2 years on flat surfaces
Electrostatic Propensity	Permanently anti-static
Standard Sizes (actual)	2' x 3' (23" x 35") 4' x 8' (45" x 95") 3' x 4' (35" x 45") 4' x 10' (45" x 116") 3' x 5' (35" x 58") 4' x 12' (45" x 142") 3' x 10' (35" x 116") 4' x 16' (45" x 189") 3' x 12' (35" x 142") 4' x 20' (45" x 236") 3' x 16' (35" x 189") 6' x 8' (70" x 95") 3' x 20' (35" x 236") 6' x 12' (70" x 142") 4' x 6' (45" x 69") 6' x 20' (70" x 236")

Custom Sizes Available

Widths (actual)	3' (35"); 4' (45"); 6' (70")
Lengths	Up to 23' long

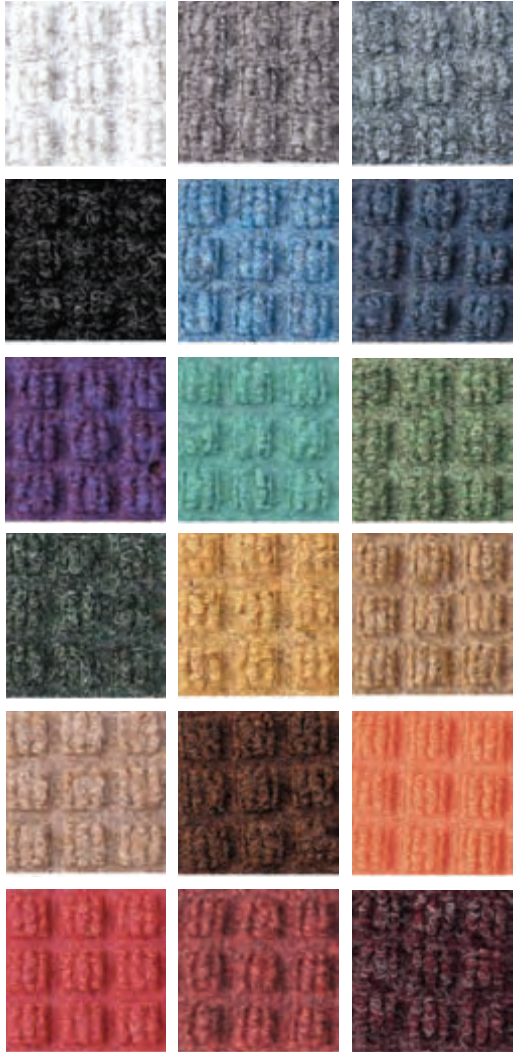

- | | |
|------------------|----------------|
| 1. White* | 2. Medium Grey |
| 3. Bluestone | 4. Charcoal |
| 5. Medium Blue | 6. Navy |
| 7. Purple* | 8. Aquamarine* |
| 9. Light Green | 10. Evergreen |
| 11. Yellow* | 12. Gold* |
| 13. Medium Brown | 14. Dark Brown |
| 15. Orange* | 16. Solid Red* |
| 17. Red/Black | 18. Bordeaux |



Nitrile Rubber Backing with Grip Nobs




Rubber Edging Holds Water In




Black Rubber Edging (standard)



Fashion Fabric Edging

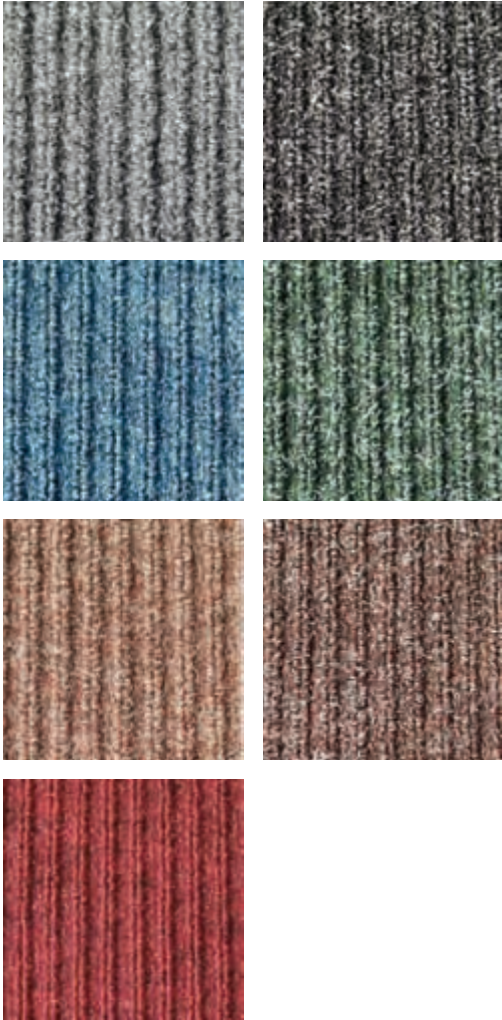

- 1. Light Gray
- 2. Charcoal
- 3. Blue
- 4. Green
- 5. Beige
- 6. Brown
- 7. Red

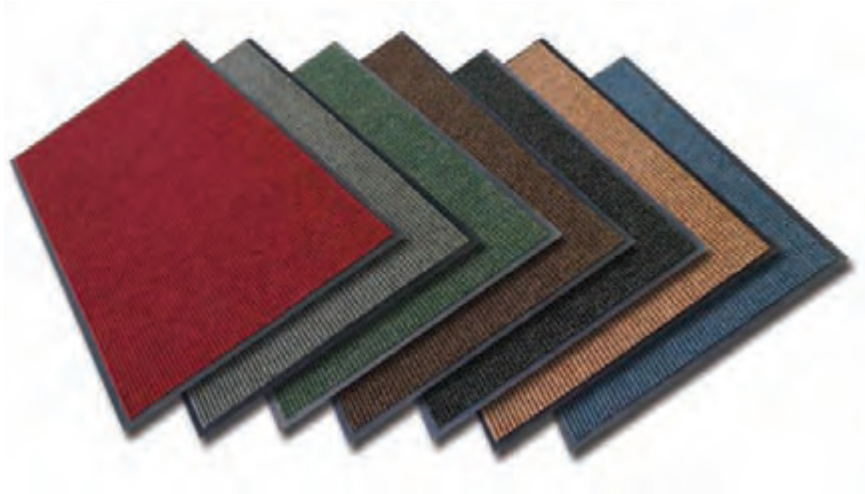


Tough Rib Plain Mats

Tough Rib Mats are ideal for entryways and ramps. these mats can be used in indoor or outdoor applications. If you are on a tight budget, this is the right solution for you.

Specifications

Construction	2x2 ribbed pattern
Fiber Content	100% solution dyed polypropylene
Pile Weight	24 oz. per s/y
Total Weight	85 oz. per s/y
Backing	Vinyl
Thickness	5/16" (8mm)
Wear Warranty	1 year on flat surfaces
Electrostatic Propensity	Permanently anti-static
Standard Sizes	18" x 24" 3' x 16' 4' x 16' 2' x 3' 3' x 20' 4' x 20' 3' x 4' 4' x 6' 6' x 8' 3' x 5' 4' x 8' 6' x 12' 3' x 10' 4' x 10' 6' x 20' 3' x 12' 4' x 12'
Custom Sizes Available	Maximum width 6' x Maximum length 75'

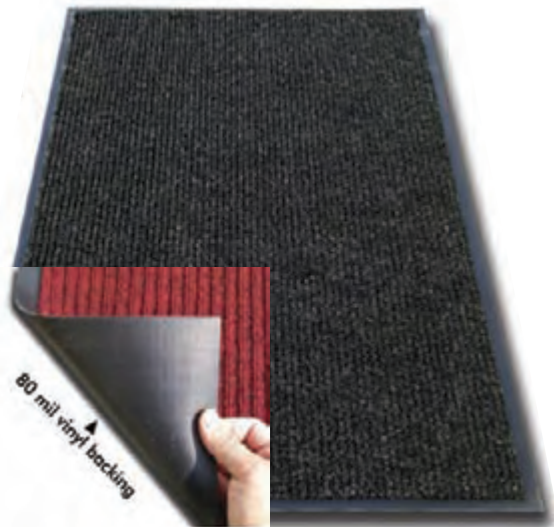



Industrial Bubble Mat

This Industrial Bubble Mat is a long lasting anti-fatigue mat that performs best in tough work environments. It's unique molded, heavy duty bubble construction creates a durable anti-fatigue mat while allowing airflow under shoes for added comfort.

- Beveled edges increase safety by reducing potential tripping and slipping
- Airpockets provide timeless comfort
- Grease/Oil Resistant

Backing: Rubber

Construction: Molded


Edging: Rubber, Yellow Border available

Colors: Black

Thickness: 5/8" (16mm)

Sizes: Standard- 2'x3', 3'x4'

Zone Defense: 3

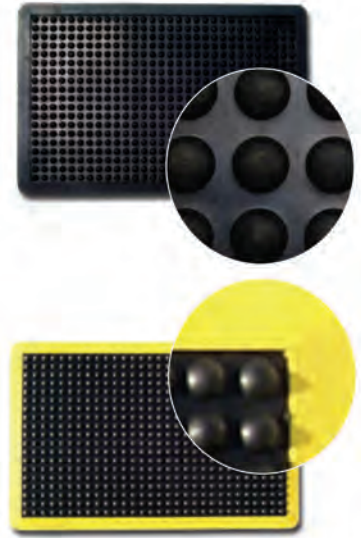

Kitchen Mat

This Kitchen Mat is fully launderable and relieves fatigue from prolonged standing. This mat can be used in wet or dry environments. It's open holes allow spilt liquid to effectively drain through the mat making it ideal for use behind a bar, in kitchen areas, machine shops and work stations. Portico Systems' Kitchen Mat is also available with GrittTuff™ – a carbide grit embedded in the mat's surface to provide extra traction in the presence of grease, oils or water.

- Anti-microbial properties inhibit growth of bacteria
- Meets all ADA Standards
- Grease/Oil Resistant
- Rubber Construction makes mat pliable

Backing: Nitrile Rubber

Construction: Molded Nitrile Rubber


Edging: Nitrile Rubber Border

Colors: Black or Red or Black w/GrittTuff™

Thickness: 1/2" (13mm)

Sizes: Width 3' x 5', 10', 15', 20'


Zone Defense: 3

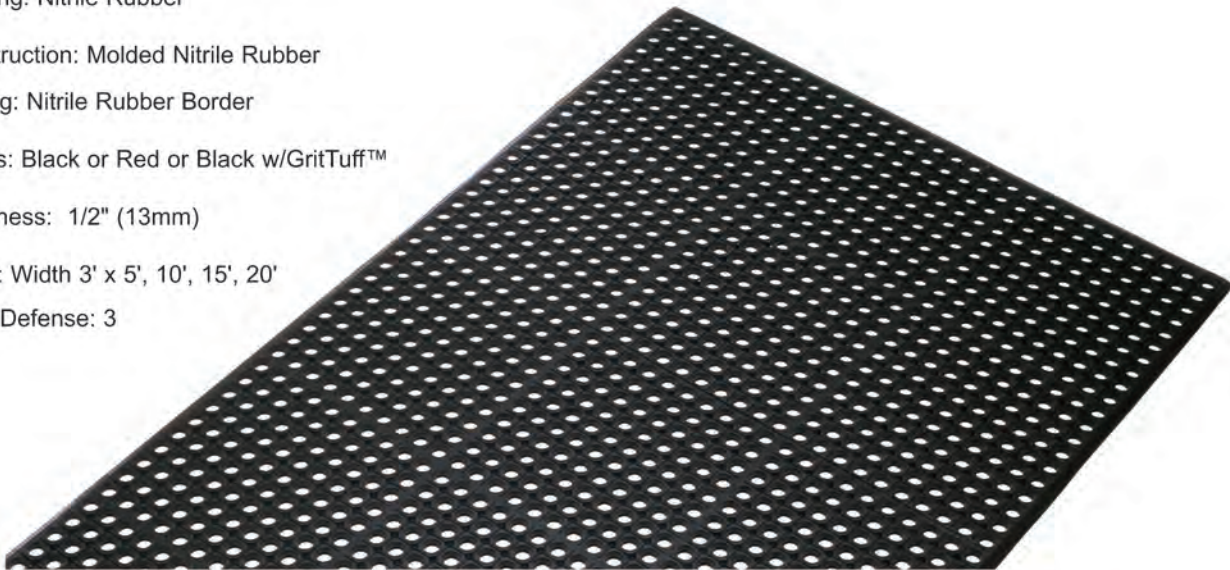


1. Black




2. Black with GrittTuff™

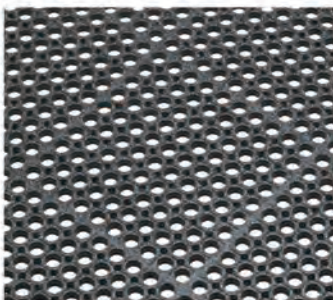

3. GrittTuff™ closeup

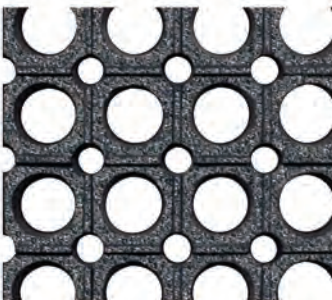

4. Red

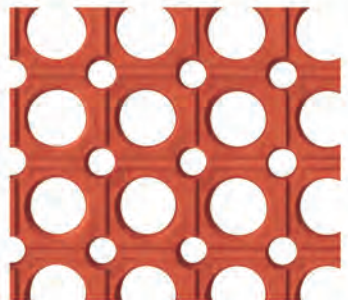

According to a 2004 productivity study, workers that stood for over 8 hours/day on anti-fatigue matting felt considerably less fatigued after work. Help reduce workers compensation claims, increase employee morale and production with our wide range of anti-fatigue matting. Ideally designed to provide unparalleled comfort with long-term performance. You can use any of these products in dry areas.

Diamond Plate Safety Step 15


Bright yellow borders promote workplace safety along with a rugged, durable, PVC/Nitrile rubber anti-fatigue matting. Diamond-Plate cushioned surface allows employees to stand or walk on beveled edges. Superior comfort and long term performance improve worker morale by providing relief to aching feet and tired legs.

Color: Black/Yellow, Plain Black Thickness: 9/16" (15mm)

Stock mat sizes: 2' X 3', 3' X 5'

Stock roll sizes: 2' X 75', 3' X 75', 4' X 75', 5' x 75', 6' X 75'

Customized sizes: Up to 75' in length- 2' cut, 3' cut, 4' cut, 5' cut, 6' cut

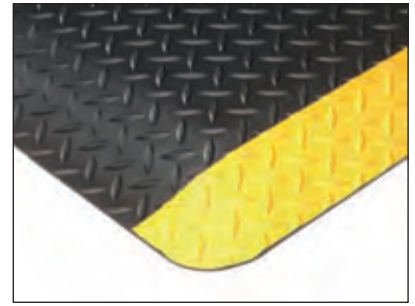

1. Black/Yellow
2. Black

Comfort Step 42




Our most economical anti-fatigue, this durable closed-cell vinyl sponge matting, improves workers comfort by providing a cushioned surface to stand or walk on. Featuring beveled edges for safety, Portico Systems' Comfort Step 42 delivers a huge relief to aching feet and tired legs.

Color: Gray or Black Thickness: 3/8" (10mm)

Embossing: Pebble or Ribbed
Stock Mat Sizes: 2' X 3', 3' X 5',

Stock Roll Sizes: 2' X 30', 3' X 30', 4' X 30', 2' X 60', 3' X 60', 4' X 60', 6' X 60'

Customized Sizes: Up to - 2' X 30', 3' X 30', 4' X 30', 2' X 60', 3' X 60', 4' X 60', 6' X 60'

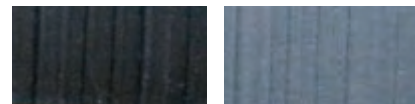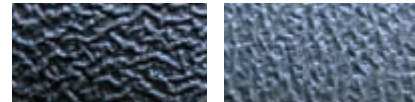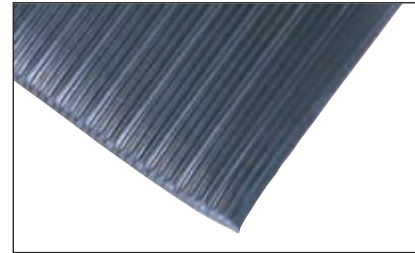

1. Black, Pebble
2. Grey, Pebble
3. Black, Rib
4. Grey, Rib

Marble Step 24

Designed to fit into any decor, this anti-fatigue matting provides an extra level of comfort due to it's unique composition of PVC/Nitrile rubber. Perfect for use in banks, retail checkouts and factory production areas, Marble Step 24 anti-fatigue is ideal in these and any other dry/heavily trafficked areas.



Color: Blue, Tan, Gray, Black, Brown,

Thickness: 1/2" (13mm) or 7/8" (23mm)


Stock Mat Sizes: 2' X 3', 3' X 5'

Stock Roll Sizes: 2' X 60', 3' X 60', 4' X 60'

Customized Sizes: Up to 75 ft. in length - 2, 3 and 4 ft. cuts

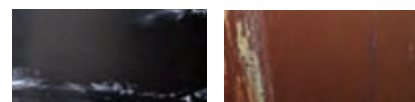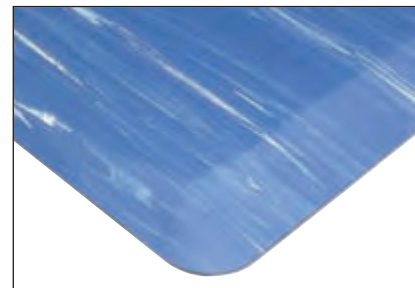

1. Blue
2. Tan
3. Grey
4. Black
5. Brown

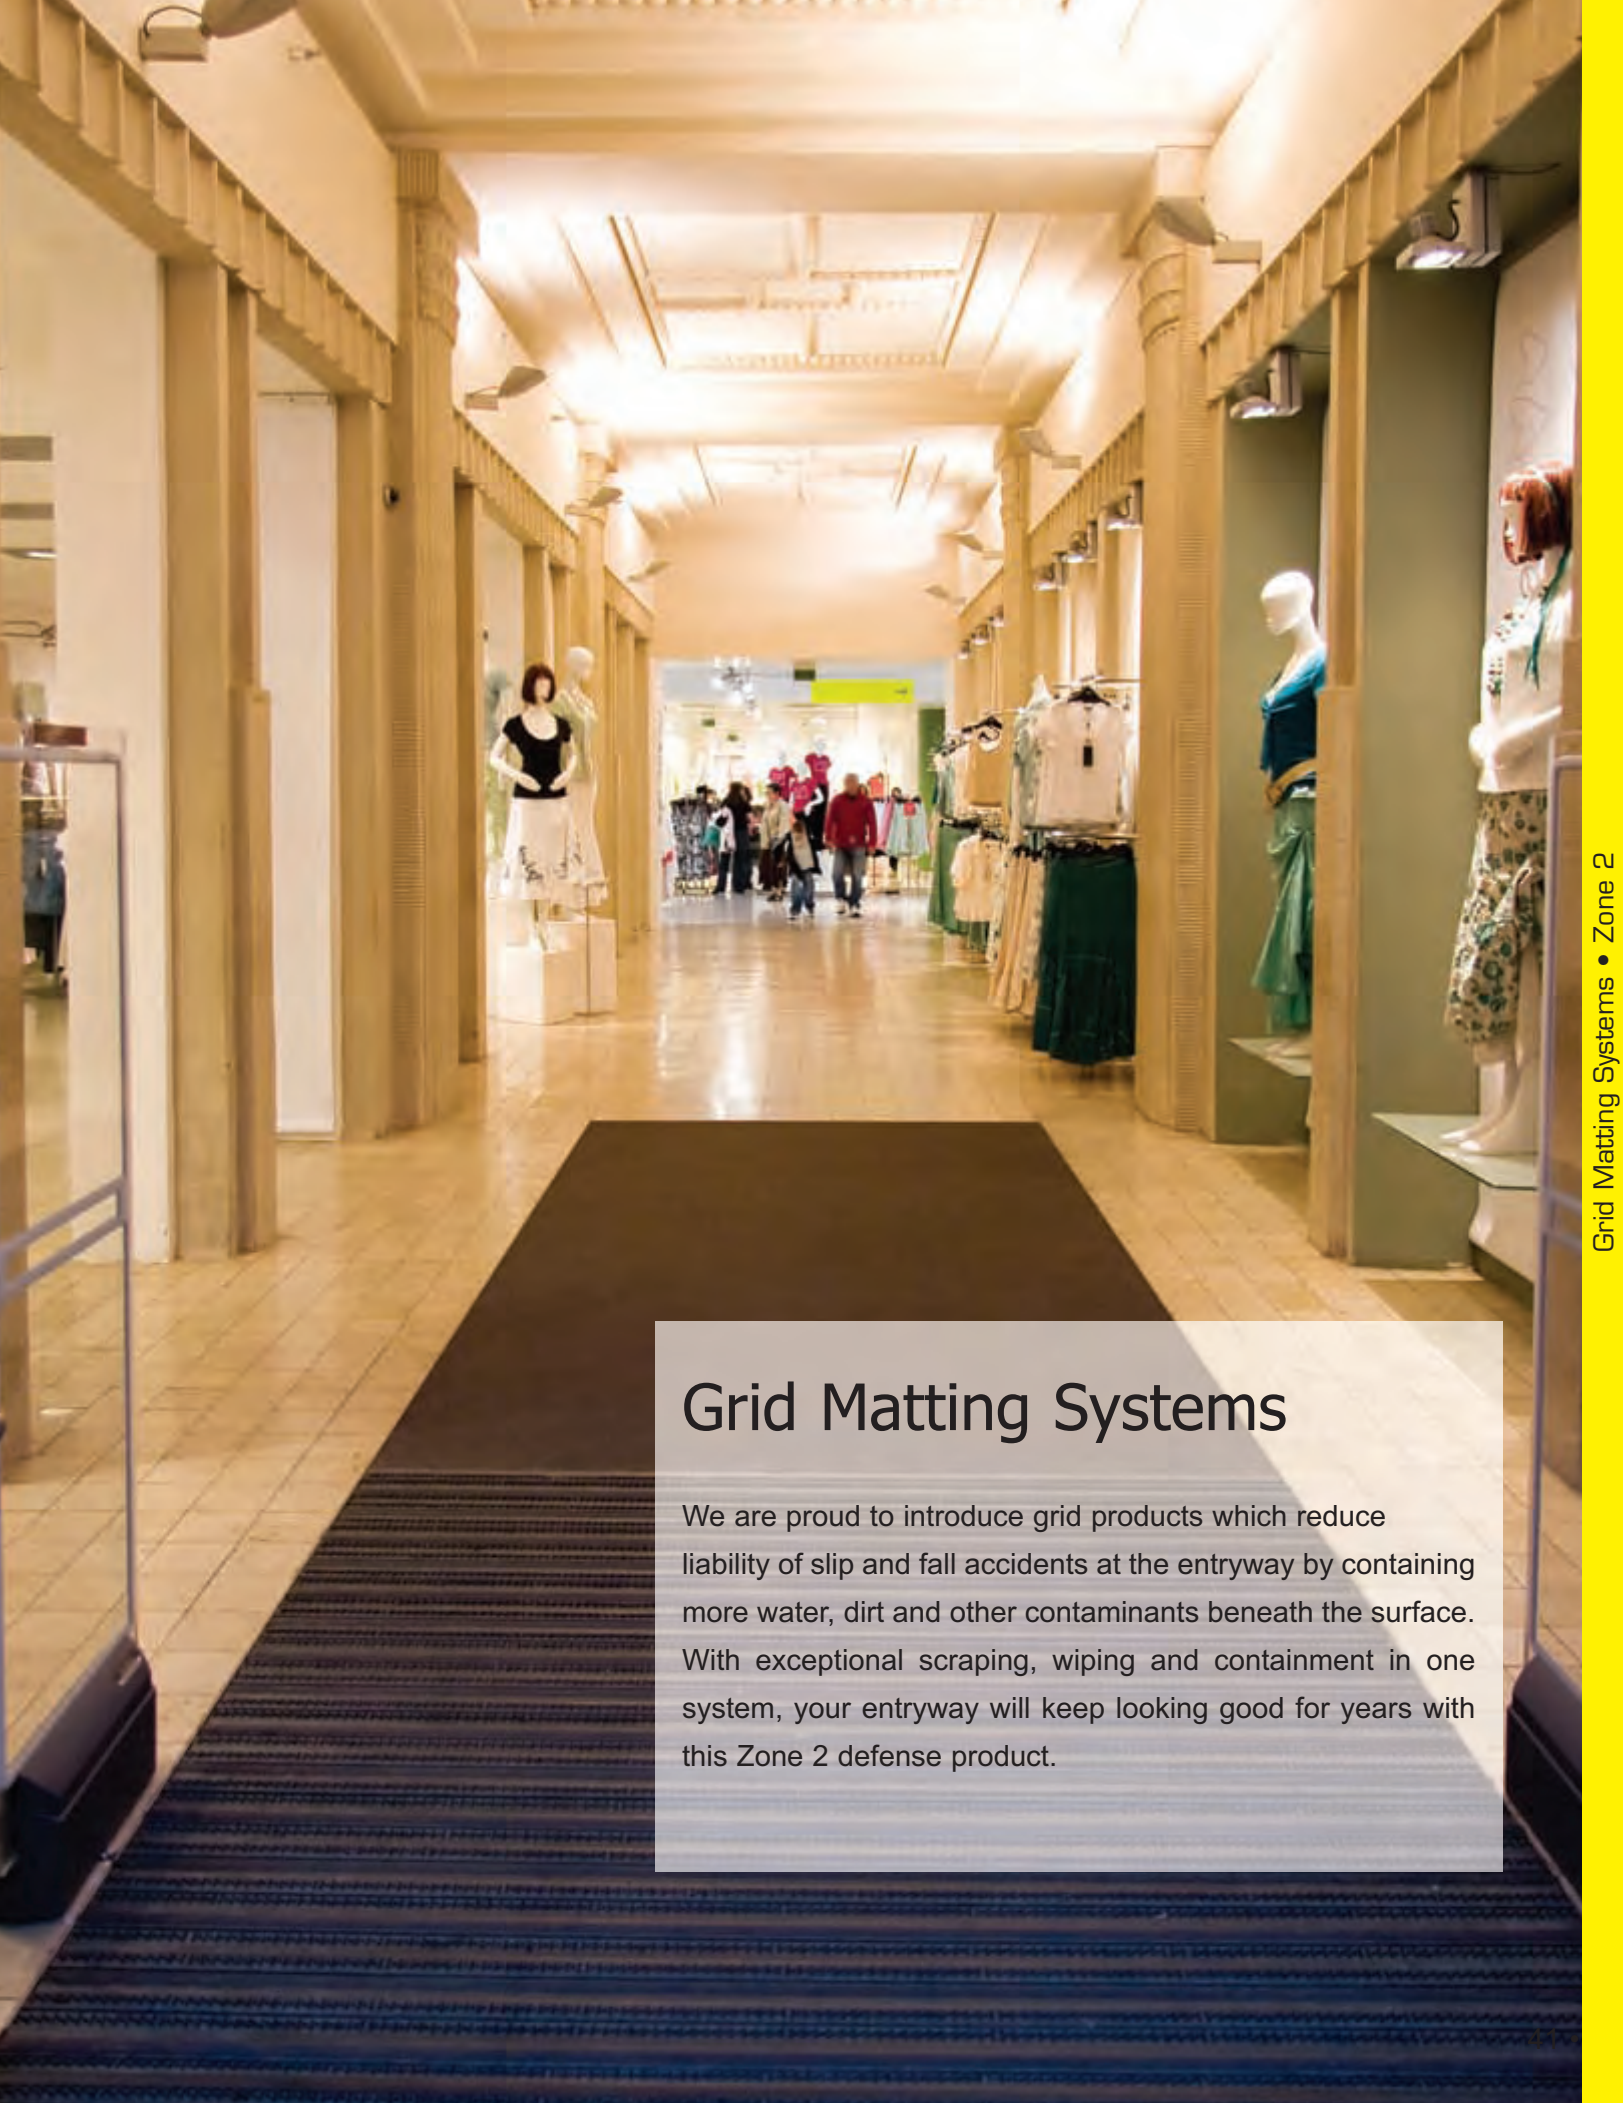

Grid Matting Systems

We are proud to introduce grid products which reduce liability of slip and fall accidents at the entryway by containing more water, dirt and other contaminants beneath the surface. With exceptional scraping, wiping and containment in one system, your entryway will keep looking good for years with this Zone 2 defense product.

Power Grid


Power-Grid flooring is designed specifically for entrances that receive repetitive, heavy foot and cart traffic. A solid vinyl flooring with an open-weave design provides an aesthetically-pleasing look while offering safety and cleaning benefits at the same time. Power-Grid is the ideal system for smooth rollovers while reducing cart noise at entryways, improving overall cleanliness and withstanding heavy traffic.

Construction: Section material is 100% PVC

Thickness: 1/2" (13mm)

ALL MATS CUSTOM MADE

Installation Options: Can be surface mounted or recessed into the floor. Well should be 1/2" deep for recessed applications.

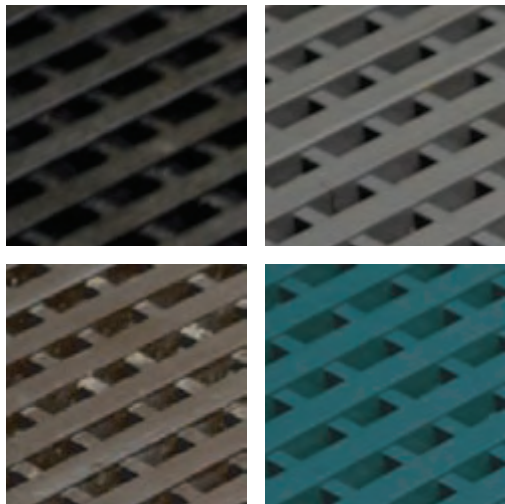

Vinyl Colors*

- | | |
|--------------------|------------------|
| 1. Black | 2. Charcoal Grey |
| 3. Chocolate Brown | 4. Forest Green |

* Custom colors available





Premier Grid

Premier-Grid provides a beautiful, finished appearance and is functionally unsurpassed. This unique open weave, grid-rib design with 1.1875 in. wide carpet strips, creates an entryway that is high on style and low on maintenance. Premier-Grid is engineered to withstand heavy foot traffic and wheeled traffic more efficiently than alternative matting systems. Now available with the TacFast® backing system.

Vinyl Color: Black, Chocolate and Forest Green,
Custom colors available


Carpet Color: Charcoal, Forest Green, Gingerbread

Construction: Section material is 100% PVC

Thickness: 1/2" (13mm)

ALL MATS CUSTOM MADE

Installation Options: Can be surface mounted or recessed into the floor.
Well should be 1/2" deep for recessed applications.



ALUMINUM TRANSITIONS for GRID MATS



Divider



Top Hat



Transitional



Transitional Overhang



Ramp

1. **DIVIDER**- Use for applications that require the grid to be separated from another product.
2. **TOPHAT**- Use for applications that require the grid to be separated from another product that has been rough cut or has a jagged edge. (IE: Ceramic tile and a grid system)
3. **TRANSITIONAL**- Use in conjunction with the Transitional Overhang or TopHat. Designed to go from the grid (1/2") to a product that is 3/8" in thickness or a recessed well that is 3/8" thick.
4. **TRANSITIONAL OVERHANG**- Use in conjunction with the Transitional divider. Can also be used on its own to reduce the grid to 3/8" thickness.
5. **RAMP**- Use for Surface Mount applications.



Vinyl/Carpet Colors

1. Black/Charcoal
2. Chocolate/Gingerbread
3. ForestGreen/Forest Green



Natures View Luxury Vinyl

NATURES VIEW recreates the beauty of natural wood with resilient flooring that offers the durability and performance required for high traffic commercial applications

NATURES VIEW planks are composed of three vinyl layers: a vinyl backing layer, a vinyl print film layer and a tough vinyl top wear layer. The heavy gauge backing and annealed construction offer excellent dimensional stability and wear resistance, while the tough vinyl top wear layer ensures superior stain resistance as well as lower maintenance.

By offering all the advantages of vinyl and adding the look and texture of natural materials, your Luxury Wood Vinyl Plank design choice is NATURES VIEW.

Natures View- Oak Collection

These 6 designs range from light to medium to dark wood tones in 4" x 36" planks. Now available with a urethane finish, the added layer helps protect against scraping and scuff marks.

1. NV1010 Henna Oak
2. NV1011 Chestnut Brown Oak
3. NV1012 Pure Oak
4. NV1018 Honey Oak
5. NV1104 Caramel Oak
6. NV1119 Light Oak

Specifications

Construction

Size 4" x 36" | 30 planks - 30 SF/carton

Overall Thickness

ASTM F-1700, ASTM F-386 3.0mm

Wear Layer Thickness

EN 429 0.50mm/20 mil

Zone Defense

3

Performance

Stability

EN 986 Pass

Abrasion Resistance

ASTM D-3889 0.300kg

Static Load Limit

ASTM F-970 <250 psi

Sound Insulation

DINS 52210 4dB

Static Coefficient of Friction (Slip Resistance)

ASTM F-2047 rated 0.61

Stain & Chemical Resistance

ASTM F-925 Excellent

Dimensional Stability

ASTM F-540 Passed

Resistance to Light

F-1515 Pass

Flammability

Radiant Panel Test


ASTM E-648 Class 1

Smoke Density



ASTM E-662 Pass <450

Heat Stability

ASTM F-1514 Passed

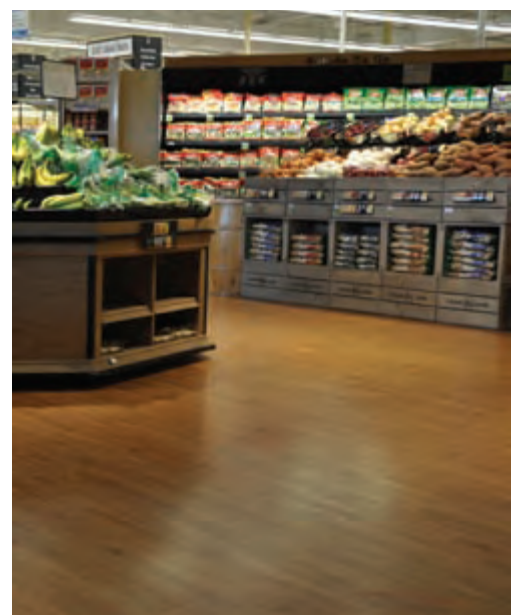


1. NVR4155 Sand
2. NVR4245 Ash
3. NVR5961 Buff
4. NVR5466 Driftwood
5. NVR5971 Dark Chestnut
6. NVR2166 Weathered Barn
7. NVR6011 Nantucket
8. NVR6042 Black Walnut

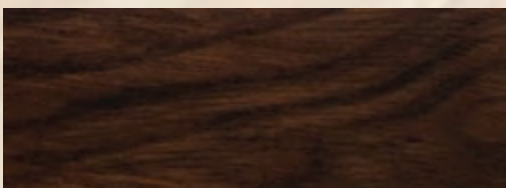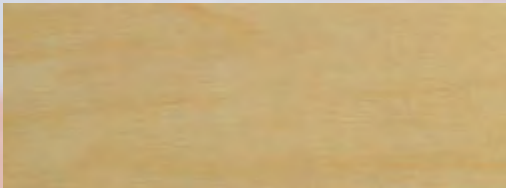

Natures View- RUSTIQUE Collection, Luxury Vinyl planks

The Natures View Style Rustique Collection is truly the perfect combination of durability, attractive design and safety all at an affordable price. This collection offers all the advantages of vinyl and then adds the look and texture of natural materials. These 6" x 36" planks come in 8 weathered "distressed" wood designs. If you are searching for a wood inspired, economical and long-lasting resilient flooring system, Natures View Style Rustique is your choice. (See page 46 for colors and styles).

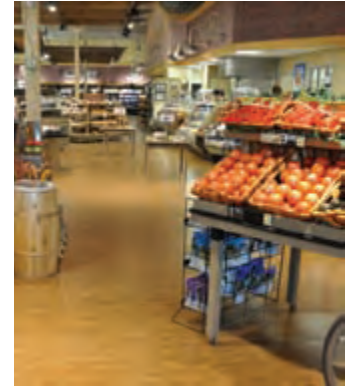

Specifications

Construction

Size	6" x 36"	
Packaging	26 planks- 39 SF/carton	
Overall Thickness	ASTM F-1700,	
	ASTM F-386	3.175mm .125"
Wear Layer Thickness	EN 429	1.0mm/40 mil
Zone Defense	3	

Performance

Stability	EN 986	Pass
Abrasion Resistance	ASTM D-3889	Pass Excellent
	<0.15 weight loss after 1,000 cycles	
Static Load Limit	ASTM F-970	<250 psi
Sound Insulation	DINS 52210	4dB
Static Coefficient of Friction (Slip Resistance)		
	ASTM F-2047	rated 0.61- ADA Compliant

Performance (Cont.)

Stain & Chemical Resistance	ASTM F-925
	Excellent
Dimensional Stability	ASTM F-540
	Passed
Resistance to Light	F-1515
	Pass
Residual Indentation	F-1914
	Pass <less than 8%

Flammability

Radiant Panel Test	ASTM E-648
	Class 1
Smoke Density	ASTM E-662
	Pass <450
Heat Stability	ASTM F-1514
	Passed
HUD/FHA Requirements	Exceeds



Nature View CONCRETE | STONE, Luxury Vinyl Tiles

This collection is available in 4 patterns/colors as 18" x 18" tiles.

Specifications


Same as the above NV 40mil product except for the following:

Size	18" x 18"
Packaging	16 TILES- 36 SF/carton
Weight per Piece	2.08 lbs.


1. NVConcrete Pebble FL2701




2. NVConcrete Sandstone FL2702

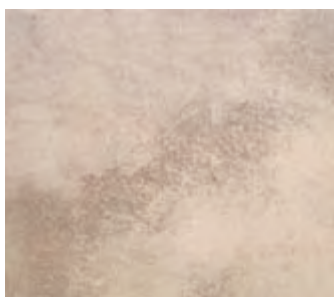

3. NVSandstone Fawn BH2712

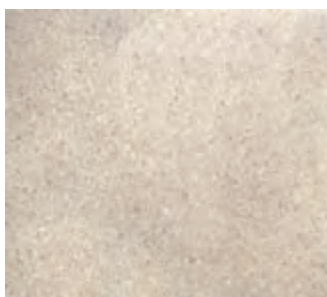


4. NVSandstone Henna BL2711

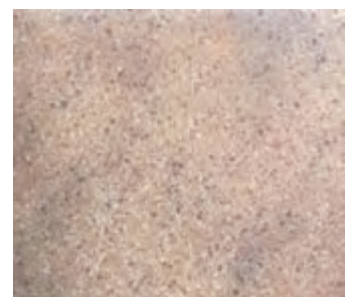

Vinyl Reducer Edging Options

All of our Roll/Sheet goods can be custom cut into all shapes and sizes. Your edging can be applied to four sides or just one, You choose based on the project. Our edging is both glued and sewn to insure maximum strength and durability. Rest assured that you are buying quality mats at an affordable price.

Low Profile Edging

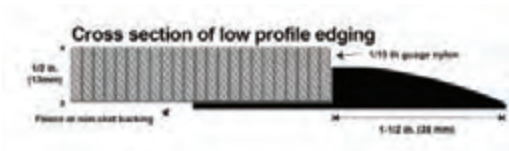


Use Low Profile Edging for the following products:

1. Mardi Gras Mats - Plain or Logo
2. Designer 38 Mats - Plain or Logo



> Edging can be used around custom shapes

High Profile Edging

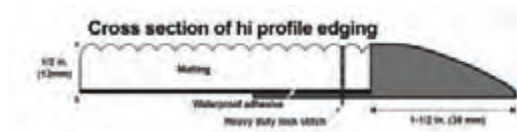


Use Low Profile Edging for the following products:

1. All Roll/Sheet Good products made into custom mats (except Captiva)
2. Champion Powerloc Mats, Plain or logo
3. Designer Coir/Coco Mats, Plain or logo




> Edging can be used around custom shapes

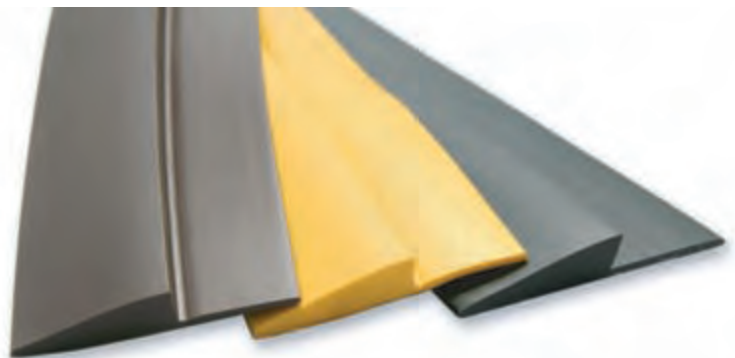




Aluminum Frame Options

All of our products can use the below frames and transitions. These frames are not required, but do ensure smooth transitions when dealing with recess wells and other multi-material use areas. Please consult your architect, contractor or rep. when deciding on a frame of transition.

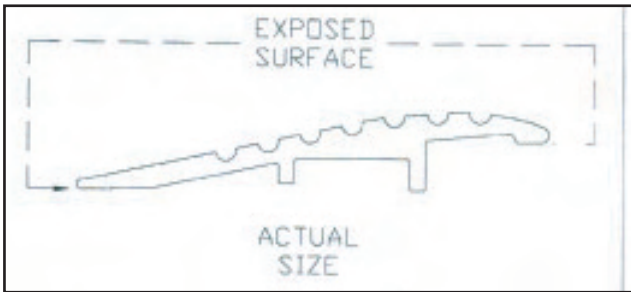


Overlap Ramp Frame

Size:	12 Feet L x 2.72 in. w
Carpet edge coverage:	.715 in.
Total Height:	.457 in.
Pre punched holes:	1/4" countersunk holes, 13 holes total
Material:	Aluminum Alloy
Construction:	Solid
Finish:	Mill
Mount:	Surface

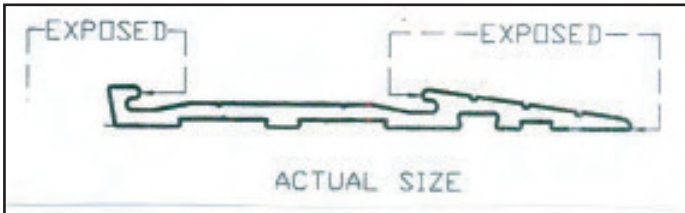

Threshold Frame

Size:	12 Feet L x 2.96 in. w
Carpet edge coverage:	Butts at .21 in.
Total Height:	.210 in.
Pre punched holes:	1/4" countersunk holes, 13 holes total
Material:	Aluminum Alloy
Construction:	Solid
Finish:	Mill
Mount:	Surface

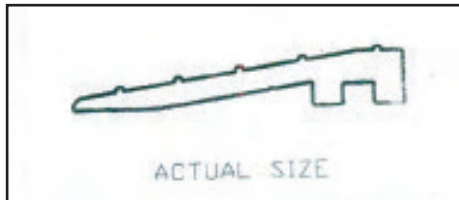

Ramp Frame

Size:	12 Feet L x 2 in. w
Carpet edge coverage:	Butts
Total Height:	.310 in.
Pre punched holes:	1/4" countersunk holes, 13 holes total
Material:	Aluminum Alloy
Construction:	Solid
Finish:	Mill
Mount:	Surface



Preventative Maintenance

Your carpet is not only a valuable investment but its appearance tells your visitors something about you. The main objective of a maintenance program is to preserve, as nearly as practical, the original beauty and appearance of the carpet and prolong its useful life.

Preventative maintenance will protect your investment, but you must plan, or program that maintenance. In the past, carpets have been neglected only to be cleaned when it was obvious that attention was necessary. This is known as "Crisis Cleaning". This approach is not only old fashioned but has been proven to be a false economy. In addition to the carpet looking scruffy, its life is being drastically reduced.

Preventative maintenance, which has to be planned, will extend the life and enhance the appearance of the carpet because the carpet "destroyer" [soil] will be effectively removed.

Removing Spots & Stains

Remember to apply cleaning agent to a blotting towel rather than directly onto the carpet. First remove any excess caused by stain, food, etc. and ensure that the area affected does not grow in size. Blot the area with a full roll of kitchen towels in order that as much fluid as possible can be absorbed. Always work towards the center. Pretest your carpet by wetting a small area (2 in. x 2 in.) in an inconspicuous area with the solution you plan to use. Blot the damp area with a white towel and look for any color absorbed into the towel, or any color change on the carpet.

Dab the spotting agent onto the stain with the moistened towel - working from the outer edge of the stain inward towards the center to keep the stain from spreading. For effective blotting action use pressure from the hand - for even more pressure use the heel of the foot. Avoid the natural tendency to scrub. Try blotting for a prolonged period of time. (The stain will naturally soak up into a weighted sack of towels.)

Stains marked with a "P" will definitely require professional attention.

TYPE OF STAIN	PROCEDURE
Alcohol, Beer	3 or P
Blood	7
Butter	1 or P
Chewing Gum	6
Chocolate	4
Coffee	3 or P
Crayon	1
Egg	2
Excrement	2 or P
Food Color*	2
Fruit Juice	4 or P
Furniture Polish	1 or P
Furniture Polish w/stain	1 or P
Glue-Model Cement	8
Glue- White	2
Gravy	4 or P
Hair Spray	1 or P

TYPE OF STAIN	PROCEDURE
Hand Lotion	1 or P
Ice Cream	4
Ink- Ballpoint	1 or P
Ink -Marking Pen	1
Ketchup	2
Lipstick	1
Oil-Cooking	1 or P
Oil- Furniture	1 or P
Mascara	1
Mayonnaise	2
Milk	4
Nail Polish	8
Paint-Latex	5
Paint-Oil Based	1 or P
Rust	P
Shoe Polish-Liquid	1 or P
Shoe Polish- Paste	1
Soft Drinks	4 or P
Sugary Sweets	4
Tar	1
Tea	3 or P
Urine	4 or P
Water Colors	5
Wax Candle	6
Wine	4 or P

Sequence of Procedures

Apply the following procedures in the correct order. Blot after each procedure.

Code Procedure

- 1 Solvent, blot, Detergent, blot, then water, blot.
- 2 Detergent, blot, Ammonia, blot, Detergent, blot, then water, blot.
- 3 Detergent, blot, Vinegar, blot, Detergent, blot, water, blot.
- 4 Detergent, blot, Ammonia, blot, Vinegar, blot, Detergent, blot, water, blot.
- 5 Detergent, blot, Ammonia, blot, water, blot, Solvent, blot.
- 6 Freeze with ice cubes, shatter with blunt object. Vacuum out chips, apply solvent, and blot (or, for wax, place paper towels or bag over wax, iron with warm (not hot) iron to absorb).
- 7 Cool water, blot, Ammonia, blot, Detergent, blot, Ammonia, blot, water, blot.
- 8 Polish remover (not oily), blot and repeat.

Detergent Solution

Mix a quality carpet/upholstery shampoo or soap flakes dissolved at the rate of two tablespoons per gallon of luke-warm water. Do not use dish washing soap.

Solvent

Any consumer brand of dry cleaning solvent.

THE SOURCE FOR COMMERCIAL FLOORCOVERINGS

> Our solutions fit every environment

www.vangelder-inc.com

